
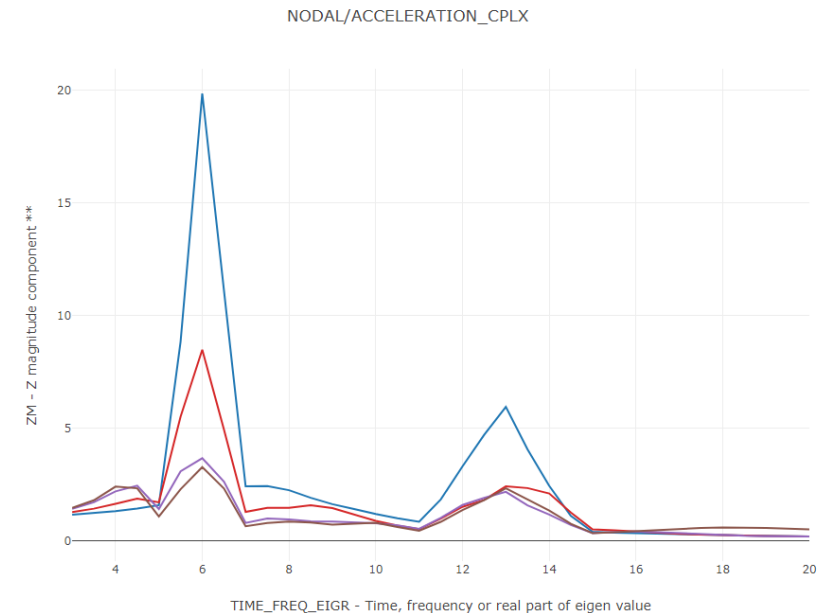


Workshop – Parameter Study, Global Optimization with a Latin Hypercube Design


AN MSC NASTRAN MACHINE LEARNING WEB APP TUTORIAL

Goal: Perform a global optimization using a Latin Hypercube design


1. Use a Latin Hypercube design to set different initial values of the design variables of an existing SOL 200 input deck
2. Perform an optimization for each sample
3. Compare the final objective of each optimization to identify the global optimal result
4. Create plots for the frequency response and objective histories

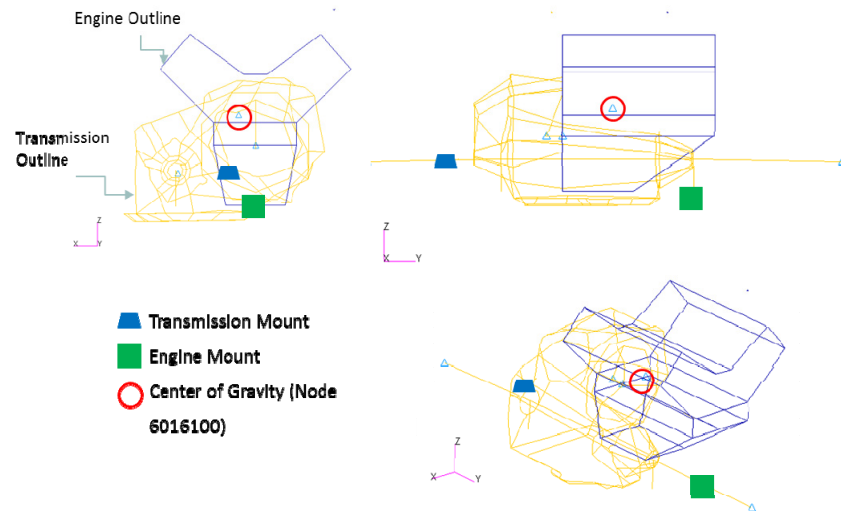

Details of the Structural Model

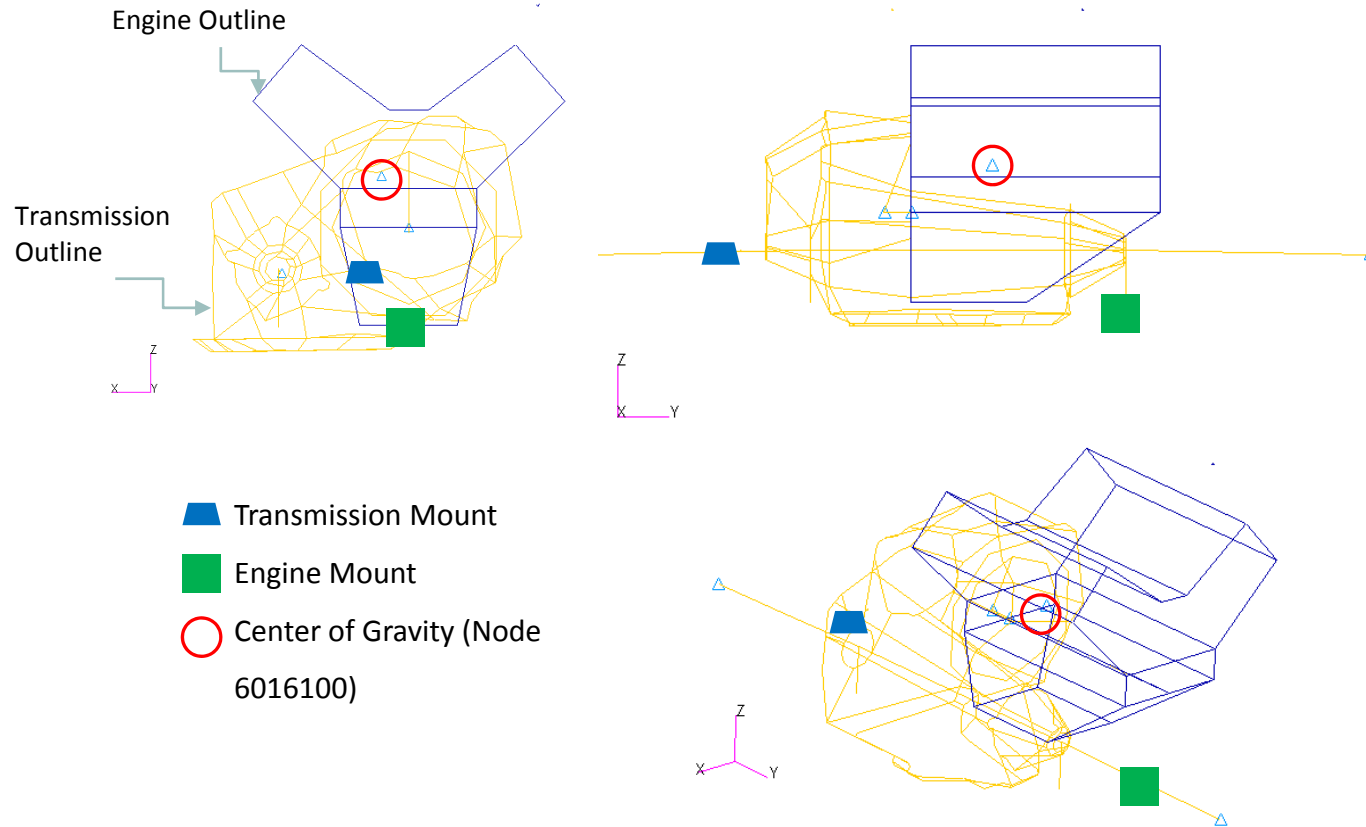

Frequency Response at CG (Node 6016100)

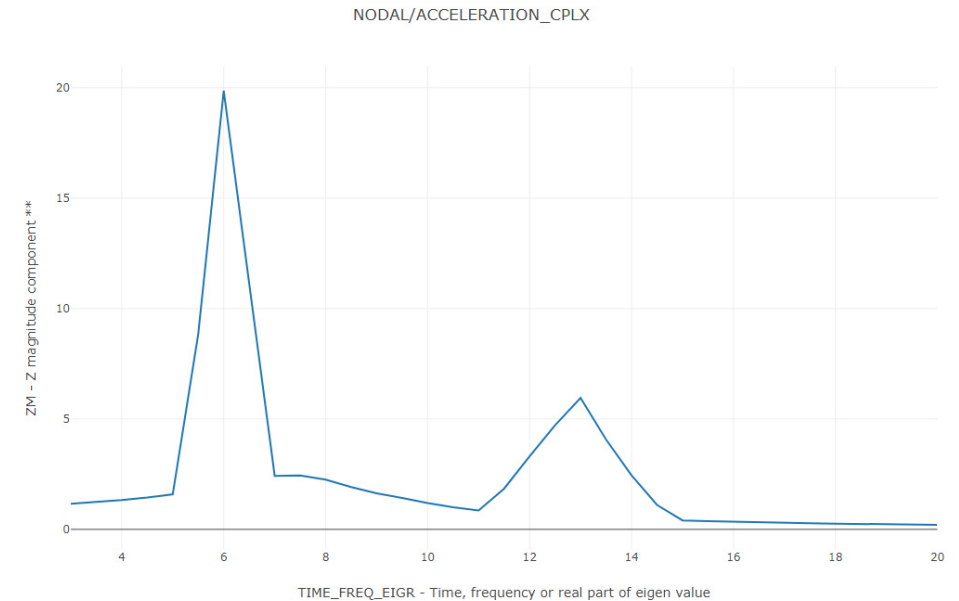

Reference: Zhang, Shenghua & Yu, Xiaoming & Johnson, Erwin. (2003). A Practical Global Optimization Procedure. 10.2514/6.2003-1671.

Problem Statement

Design Variables

x1: The starting value of design variable 1 (XINIT of DESVAR 6016011)


x2: The starting value of design variable 2 (XINIT of DESVAR 6016012)

...

x20: The starting value of design variable 11 (XINIT of DESVAR 6016243)

Samples

A Latin Hypercube design is used. Forty samples are generated, but only the first 20 samples are executed.

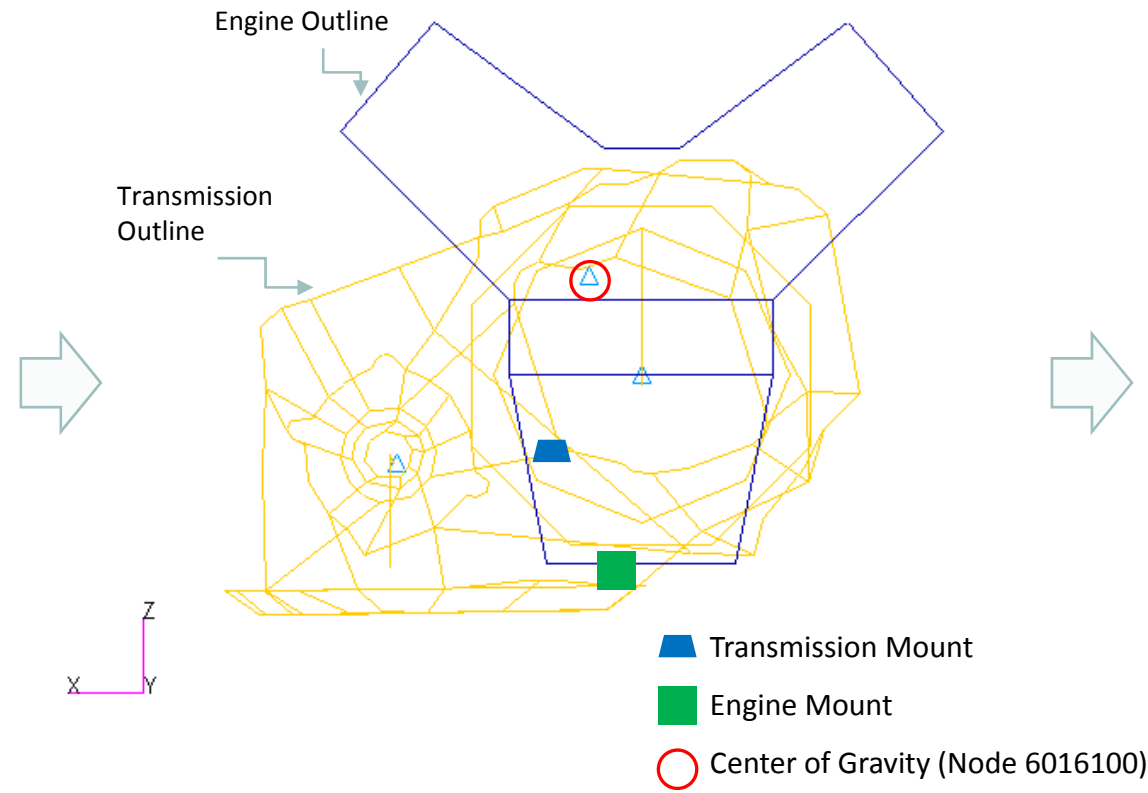

Monitored Responses


r1: Objective value of the final design cycle

r2: Normalized constraint value of the final design cycle

More Information Available in the Appendix

The Appendix includes information regarding the following:

- Response Configuration
 1. Use FINAL response: Yes, No or blank
- Equivalent Global Optimization
- How to import and edit previous parameter studies

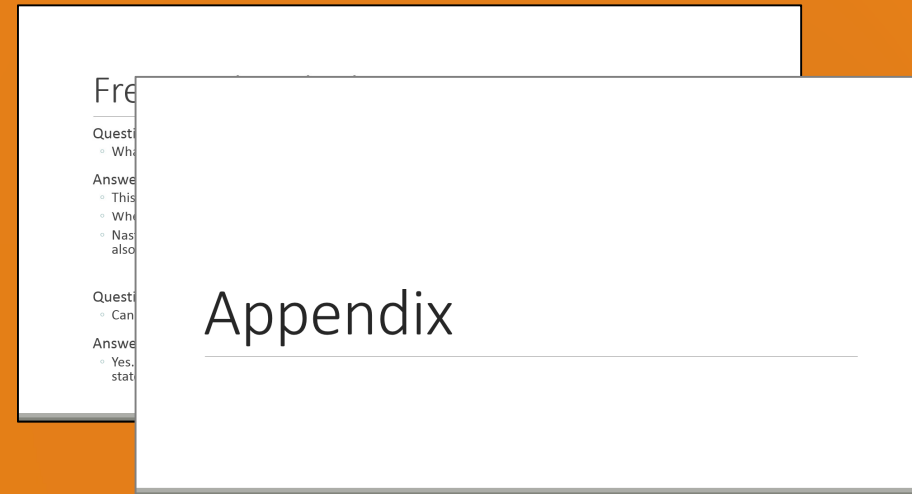

Contact me

- Nastran SOL 200 training
- Nastran SOL 200 questions
- Structural or mechanical optimization questions
- Access to the SOL 200 Web App

christian@ the-engineering-lab.com

Tutorial

Tutorial Overview

1. Start with a .bdf or .dat file
2. Use the SOL 200 Web App to:
 - Select parameters and configure multiple BDF configurations
 - Select responses to monitor
 - Use MSC Nastran to run each BDF configuration
3. Review the monitored responses

Special Topics Covered

Equivalent Global Optimization - MSC Nastran SOL 200 has a capability to perform Global Optimization. This tutorial describes a procedure to configure multiple local optimizations, track responses and determine global optimal designs. A Maximin Latin Hypercube design is used to configure different initial values for the design variables, and a local optimization is performed for each configuration, or sample. Ultimately, this procedure is comparable to Global Optimization.

Automatic Response Extraction – Often responses are manually or automatically extracted from the F06 file. This becomes challenging when extracting responses from multiple F06 files. This tutorial highlights the web app's ability to automatically extract responses from multiple H5 files with minimal user effort.

SOL 200 Web App Capabilities

The Post-processor Web App and HDF5 Explorer are free to MSC Nastran users.


Compatibility

- Google Chrome, Mozilla Firefox or Microsoft Edge
- Windows and Red Hat Linux
- Installable on a company laptop, workstation or server. All data remains within your company.


Web Apps

Benefits


- REAL TIME error detection. 200+ error validations.
- REAL TIME creation of bulk data entries.
- Web browser accessible
- Free Post-processor web apps
- +80 tutorials

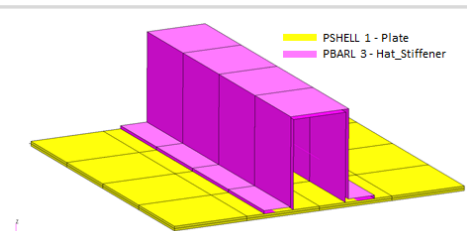


Web Apps for MSC Nastran SOL 200
Pre/post for MSC Nastran SOL 200.
Support for size, topology, topometry, topography, multi-model optimization.

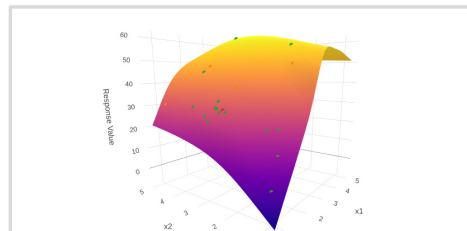


Machine Learning Web App
Bayesian Optimization for nonlinear response optimization (SOL 400)

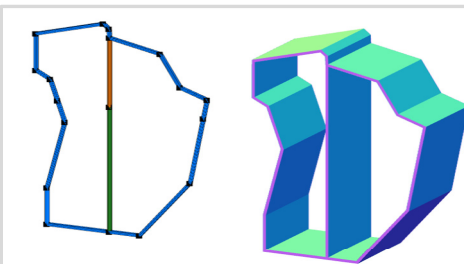


PBMSECT Web App
Generate PBMSECT and PBRSECT entries graphically

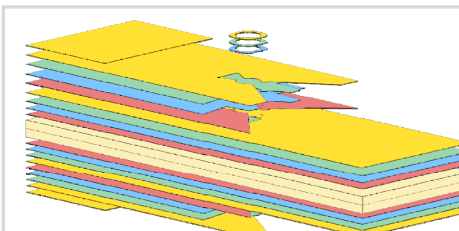


Ply Shape Optimization Web App
Optimize composite ply drop-off locations, and generate new PCOMPG entries

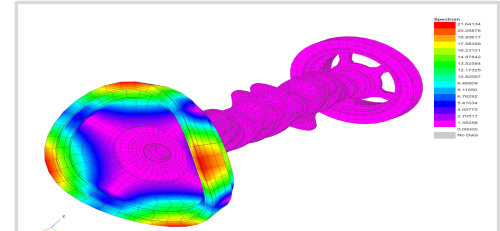


Post-processor Web App
View MSC Nastran results in a web browser on Windows and Linux

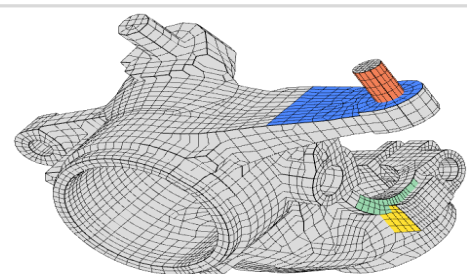


Shape Optimization Web App
Use a web application to configure and perform shape optimization.

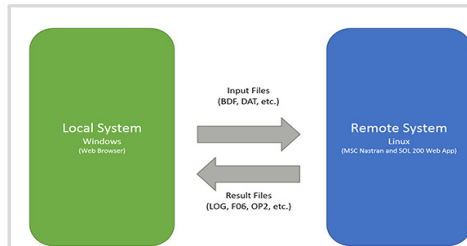


Remote Execution Web App
Run MSC Nastran jobs on remote Linux or Windows systems available on the local network

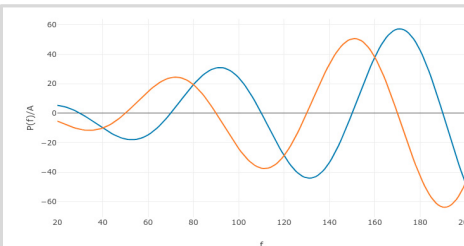

Dynamic Loads Web App
Generate RLOAD1, RLOAD2 and DLOAD entries graphically

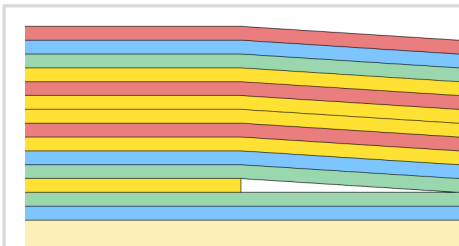

Stacking Sequence Web App
Optimize the stacking sequence of composite laminate plies

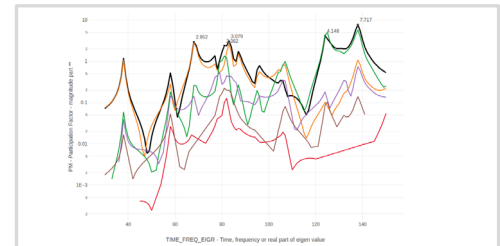


HDF5 Explorer Web App
Create graphs (XY plots) using data from the H5 file

Before Starting

1. Ensure the Downloads directory is empty in order to prevent confusion with other files

- Throughout this workshop, you will be working with multiple file types and directories such as:
 - .bdf/.dat
 - nastran_working_directory
 - .f06, .log, .pch, .h5, etc.
- To minimize confusion with files and folders, it is encouraged to start with a clean directory.

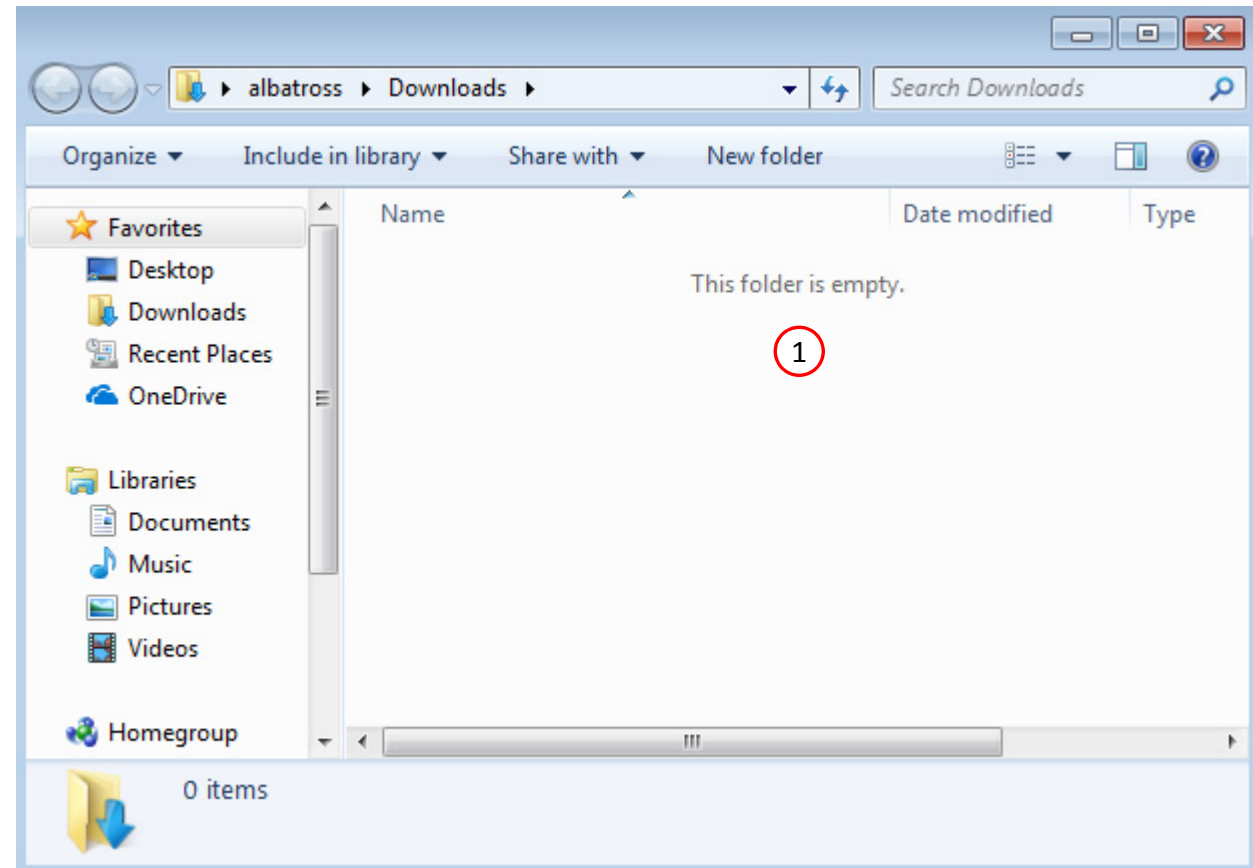

Go to the User's Guide

1. Click on the indicated link


- The necessary BDF files for this tutorial are available in the Tutorials section of the User's Guide.



Obtain Starting Files

1. Find the indicated example
2. Click Link
3. The starting file has been downloaded

- When starting the procedure, all the necessary BDF, or DAT, files must be collected and uploaded together. Relevant INCLUDE files must also be collected and uploaded.

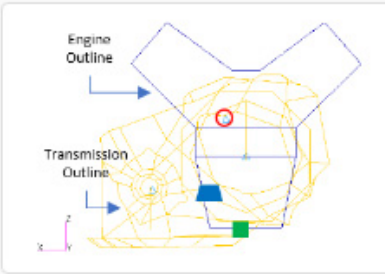


1

Parameter Study, Global Optimization with a Maximin Latin Hypercube Design

Consider the optimization of a generic engine model that represents a V6 engine and automatic transmission as well as other components such as engine mount, transmission mount, crankshaft, drive axles, and flywheel. The Parameter Study web app is used to configure multiple local optimizations, each with different initial values for the variables, and MSC Nastran is used to perform each optimization. Frequency response plots are created afterward. The process of performing multiple local optimizations, then taking the best, or optimal, design is known as Global Optimization.

Starting Files: [Link](#) **2**




Solution BDF Files: [Link](#)

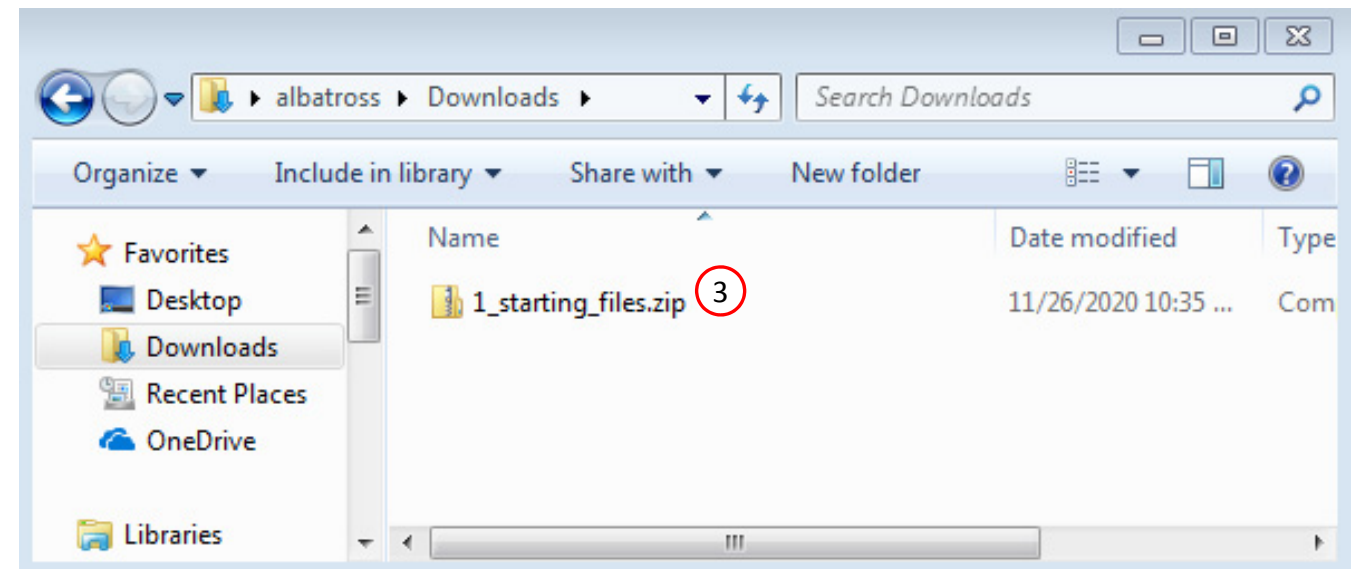

Obtain Starting Files

1. Right click on the zip file
2. Select Extract All...
3. Click Extract
4. The starting files are now available in a folder




- The starting files for this tutorial are contained in a ZIP file and must be extracted as shown.

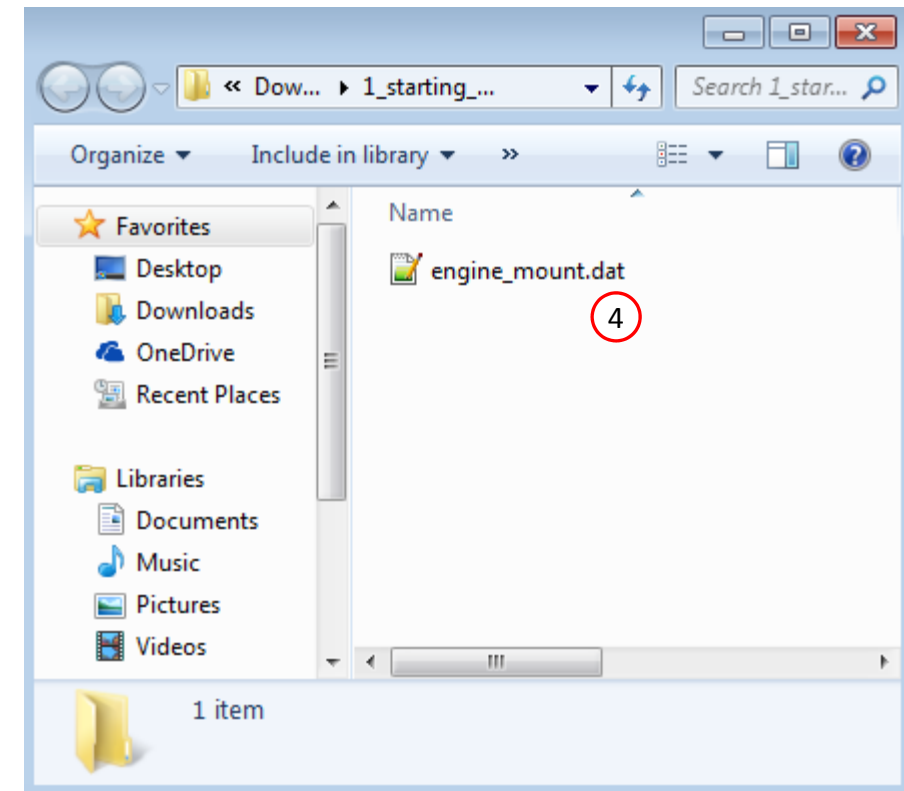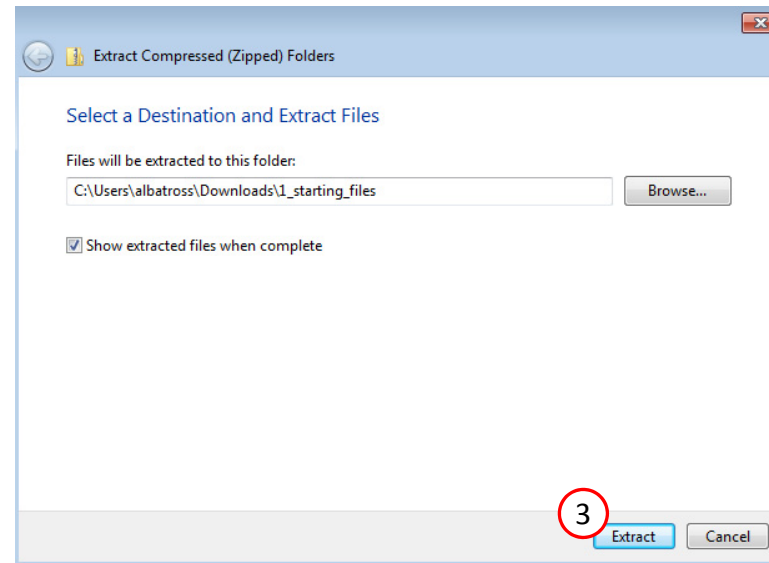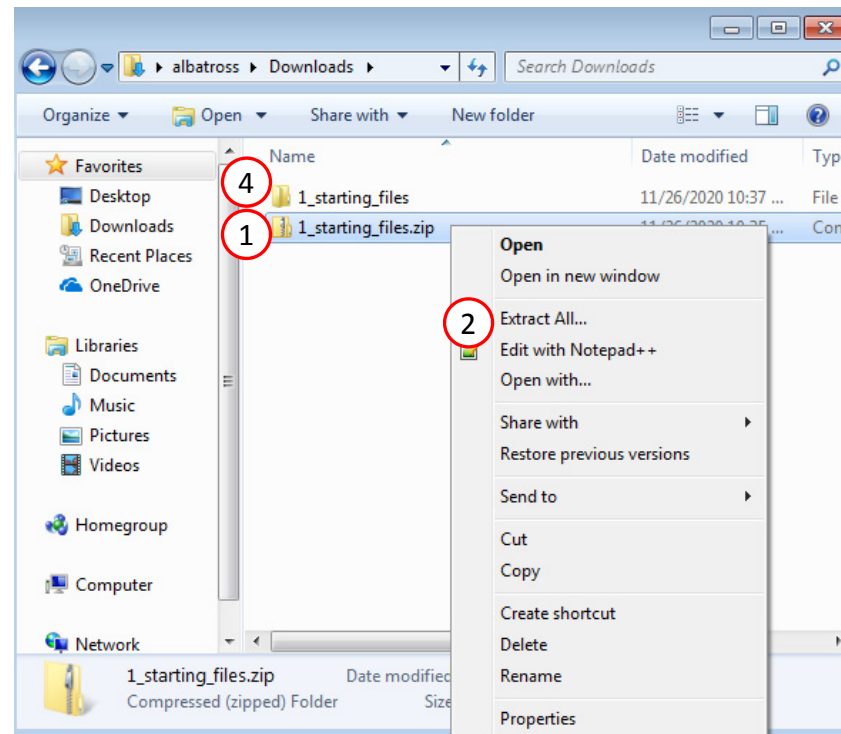

Create the Starting H5 File

A starting H5 file must be created. This H5 file will be used to configure the responses later on.

1. Double click the MSC Nastran desktop shortcut
2. Navigate to the directory named 1_starting_files
3. Select the indicated file
4. Click Open
5. Click Run
6. The starting H5 file is created

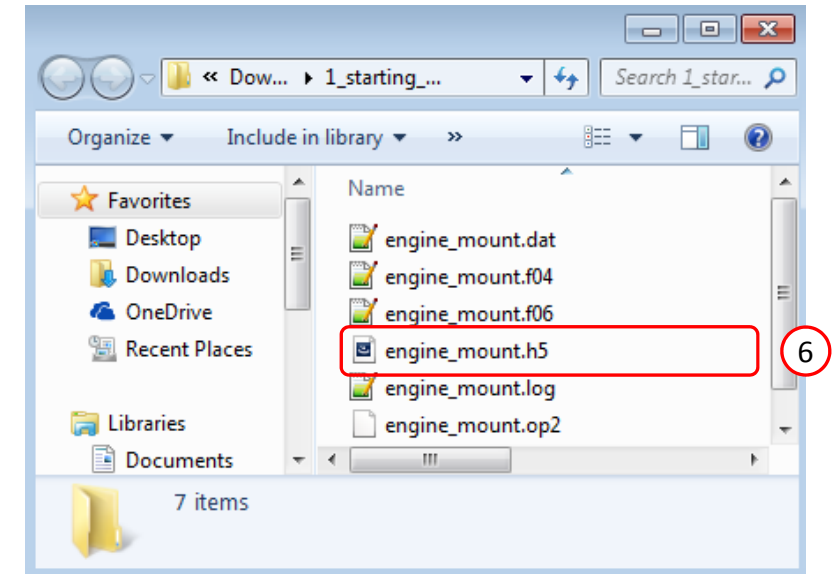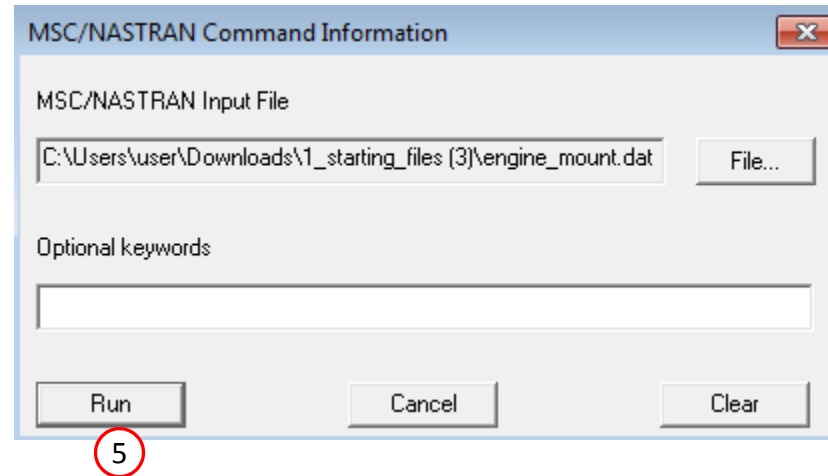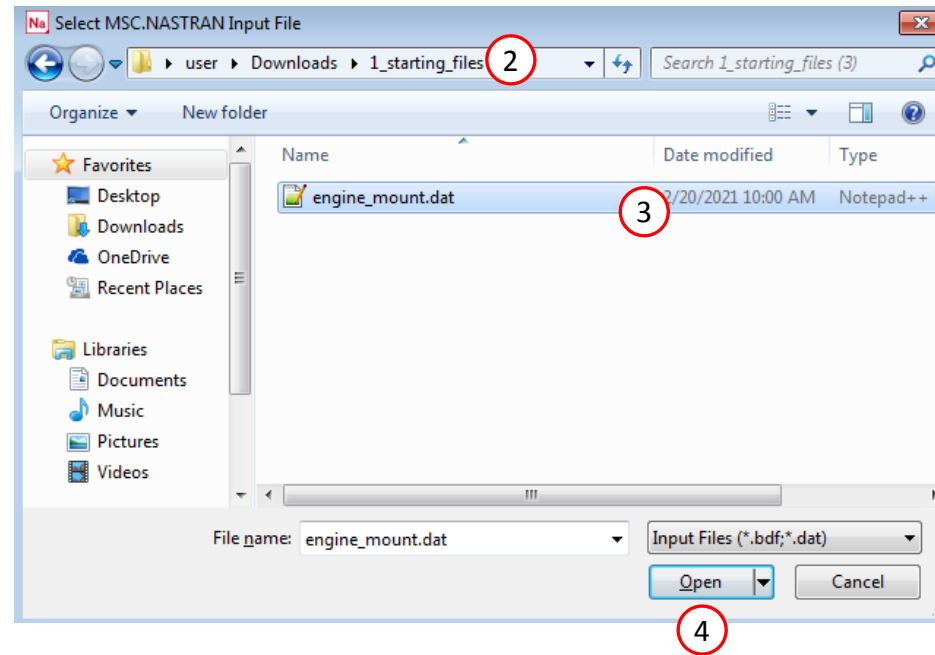

Use the same MSC Nastran version throughout this exercise

The following applies if you have multiple versions of MSC Nastran installed.

To ensure compatibility, use the same MSC Nastran version throughout this exercise. For example, scenario 1 is OK but scenario 2 is NOT OK.

- Scenario 1 - OK
 - MSC Nastran 2021 is used to create the starting H5 file.
 - MSC Nastran 2021 is used for each run during Machine Learning or Parameter study.
- Scenario 2 – NOT OK
 - MSC Nastran 2018.2 is used to create the starting H5 file.
 - MSC Nastran 2021 is used for each run during Machine Learning or Parameter study.

Using the same MSC Nastran version is critical for consistent response extraction from the H5 file. A response configured for Nastran version X may not match in Nastran version Y, which leads to unsuccessful response extraction from the H5 files. The goal is to make sure all H5 files generated are from the same MSC Nastran version.

Open the Correct Page

1. Click on the indicated link

- MSC Nastran can perform many optimization types. The SOL 200 Web App includes dedicated web apps for the following:
 - Optimization for SOL 200 (Size, Topology, Topometry, Topography, Local Optimization, Sensitivity Analysis and Global Optimization)
 - Multi Model Optimization
 - Machine Learning
- The web app also features the HDF5 Explorer, a web application to extract results from the H5 file type.






Select BDF Files

1. Select files engine_mount.dat

Inspecting: 100%

4. Upload files

Uploading: 100 %

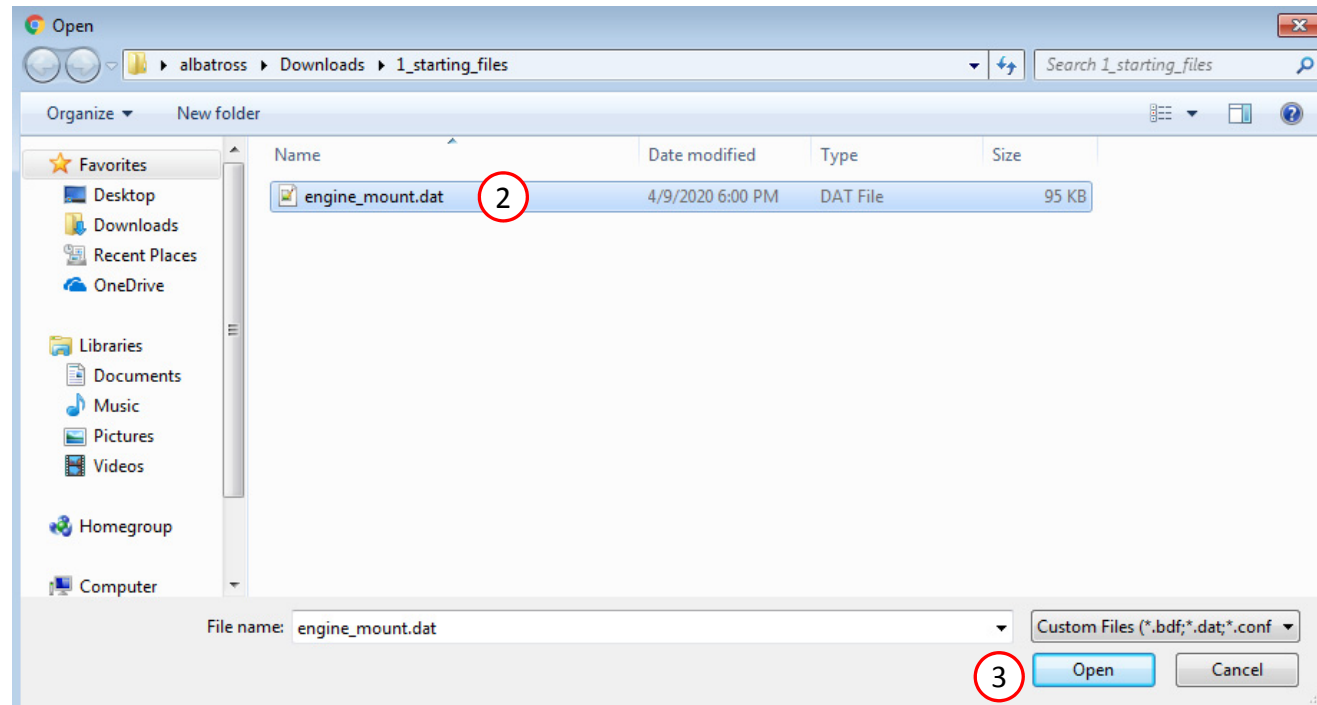

Select BDF Files

1. Click Select files
2. Select the indicated files
3. Click Open
4. Click Upload files

- When starting the procedure, all the necessary BDF, or DAT, files must be collected and uploaded together. Relevant INCLUDE files must also be collected and uploaded.

Parameters

- Set the following fields as parameters
 - x1: The starting value of design variable 1 (XINIT of DESVAR 6016011)
 - x2: The starting value of design variable 2 (XINIT of DESVAR 6016012)
 - ...
 - x20: The starting value of design variable 11 (XINIT of DESVAR 6016243)

- A parameter has been created for the selected field

- Bulk data entries will always be displayed in the small field format.
- Only fields that have real or integer data entries may be selected as parameters. If the field is blank or contains only characters, the field may not be selected.

Select Parameters

\$ _1_ _2_ _3_ _4_ _5_ _6_					
DAREA	101	6016999	3	1.E4	
DAREA	6016215	6016100	5	10000.0	
DAREA	6016223	6016100	3	1000.00	
DAREA	6016233	6016100	3	1000.00	
DAREA	6016243	6016100	3	1000.00	
DAREA	6016253	6016100	3	1000.00	
DAREA	6016263	6016100	3	1000.00	
DAREA	6016273	6016100	3	1000.00	
DAREA	6016283	6016100	3	1000.00	
DAREA	6016293	6016100	3	1000.00	
DAREA	6016303	6016100	3	1000.00	
DAREA	6016997	6016999	2	1.E4	
DESVAR	6016011	Trans_KX	%x1%	.80000	2.00000
DESVAR	6016012	Trans_KY	%x2%	.80000	2.00000
DESVAR	6016013	Trans_KZ	%x3%	.80000	2.00000
DESVAR	6016021	EngineKX	%x4%	.80000	2.00000
DESVAR	6016022	EngineKY	%x5%	.80000	2.00000
DESVAR	6016023	EngineKZ	%x6%	.80000	2.00000
DESVAR	6016031	L_Tq_SKX	%x7%	.80000	2.00000
DESVAR	6016041	R_Tq_SKX	%x8%	.80000	2.00000
DESVAR	6016211	Trans_DX	%x9%	1558.0	1758.0
DESVAR	6016212	Trans_DY	%x10%	-547.0	-347.0
DESVAR	6016213	Trans_DZ	%x11%	400.0	600.0
DESVAR	6016221	EngineDX	%x12%	1497.0	1697.0
DESVAR	6016222	EngineDY	%x13%	180.5	380.5
DESVAR	6016223	EngineDZ	%x14%	297.0	497.0
DESVAR	6016231	L_Tq_SDX	%x15%	1258.0	1458.0
DESVAR	6016232	L_Tq_SDY	%x16%	-265.0	-65.0
DESVAR	6016233	L_Tq_SDZ	%x17%	849.0	1049.0
DESVAR	6016241	R_Tq_SDX	%x18%	1258.0	1458.0
DESVAR	6016242	R_Tq_SDY	%x19%	91.0	291.0
DESVAR	6016243	R_Tq_SDZ	%x20%	849.0	1049.0
DLOAD	6016999	1.00000	1.00000	6016998	

Configure Parameters

Delete	Parameter	Status	Low	High	Comments
	x1		.80000	2.00000	Field 4 of DESVAR 6016011
	x2		.80000	2.00000	Field 4 of DESVAR 6016012
	x3		.80000	2.00000	Field 4 of DESVAR 6016013
	x4		.80000	2.00000	Field 4 of DESVAR 6016021
	x5		.80000	2.00000	Field 4 of DESVAR 6016022
	x6		.80000	2.00000	Field 4 of DESVAR 6016023
	x7		.80000	2.00000	Field 4 of DESVAR 6016031
	x8		.80000	2.00000	Field 4 of DESVAR 6016041
	x9		1558.0	1758.0	Field 4 of DESVAR 6016211
	x10		-547.0	-347.0	Field 4 of DESVAR 6016212
	x11		400.0	600.0	Field 4 of DESVAR 6016213
	x12		1497.0	1697.0	Field 4 of DESVAR 6016221
	x13		180.5	380.5	Field 4 of DESVAR 6016222
	x14		297.0	497.0	Field 4 of DESVAR 6016223
	x15		1258.0	1458.0	Field 4 of DESVAR 6016231
	x16		-265.0	-65.0	Field 4 of DESVAR 6016232
	x17		849.0	1049.0	Field 4 of DESVAR 6016233
	x18		1258.0	1458.0	Field 4 of DESVAR 6016241
	x19		91.0	291.0	Field 4 of DESVAR 6016242
	x20		849.0	1049.0	Field 4 of DESVAR 6016243

Samples

1. Click Samples
2. Set the Design as Latin Hypercube, Maximin
3. Set the Number of Runs as 40
4. Forty samples have been created
5. Click + Options
6. Click Export
7. A new CSV file named samples.csv has been download

- The samples were created as follows:
 1. A Latin Hypercube design is used to generate 40 samples.
 2. An optimization is performed on all 40 samples using the Maximin Distance Criterion to ensure the sampling points are better uniformly distributed across the design space.
- The traditional Latin Hypercube design uses randomization to generate the sampling points. In the interest of reproducibility, the web app uses a static and pre-calculated Latin Hypercube design.

SOL 200 Web App - Machine Learning

Parameters **Samples** Responses Download Results Connection Settings Home

1

Configure Samples

Design
Latin Hypercube, Reproducible 2

+ Info

Number of Samples
40 3

Samples to Run

5 + Options

CSV Export

6 Export

4

	Parameters				
Sample Number	x1	x2	x3	x4	x5
1	1.243348	1.647636	1.956198	1.241524	1.770668
2	1.201435	1.316138	1.553263	1.386487	1.80035
3	1.255096	1.8311	1.619651	.8056	1.248585
4	1.96449	1.056862	1.29066	.9567	1.682014
5	1.110327	1.69477	1.493055	.8829	1.890345

« 1 2 3 4 5 6 7 8 » 5 10 20 30 40 50

3 items

7

Samples

1. Open the CSV file samples.csv in Excel
2. Delete samples 21 through 40, the CSV file should only have samples 1 through 20
3. Save the CSV file

- Time or computer resource constraints may limit the number of samples that can be evaluated. For this tutorial, only half of the samples are evaluated.
- Samples 0 and 1-20 are considered for evaluation. Excel is used to customize the samples. On the next slide, the CSV file is uploaded to the Parameter Study web app.

3

1

samples.csv - Excel

File Home Insert Page Layout Formulas Data Review View Tell me what you want to do Share

E38

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
1	Sample N	x1	x2	x3	x4	x5	x6	x7	x8	x9	x10	x11	x12	x13	x14	x15	x16	x17	x18	x19	x20
2	1	1.243348	1.647636	1.956198	1.241524	1.770668	1.692282	1.578243	1.739022	1685.5	-363.2	547.29	1524.7	221.07	427.32	1354.2	-79.99	860.17	1290.9	206.59	1029.8
3	2	1.201435	1.316138	1.553263	1.386487	1.80035	1.890011	1.218152	1.277951	1568.2	-485.4	583.06	1669	220.05	481.16	1374.8	-244.3	953.81	1265.4	244.72	1019.5
4	3	1.255096	1.8311	1.619651	0.8056	1.248585	1.156337	1.6907	1.130327	1603.5	-526.2	449.64	1639.5	372.23	445.38	1285.2	-100.3	994.21	1272.7	175.87	997.11
5	4	1.96449	1.056862	1.29066	0.9567	1.682014	1.724624	1.019813	1.038168	1650.9	-517.2	420.99	1584.1	329.2	387.95	1403.3	-168	936.21	1423.7	92.588	988.76
6	5	1.110327	1.69477	1.493055	0.8829	1.890345	1.51531	0.8539	0.8423	1726.8	-397.6	485.37	1655.3	322.02	345.05	1352	-191.8	896.63	1371.6	228.43	1047.7
7	6	1.641778	1.189192	0.9678	1.636607	1.595268	1.471901	1.181464	1.956676	1596	-417.5	453.69	1500.7	335.93	468.9	1426	-259.4	869.62	1313.6	249.06	1024.7
8	7	0.9359	1.615207	1.676311	1.282424	1.326578	0.8797	1.776817	1.835552	1560.6	-431	499.49	1650.5	301.04	422.37	1380.2	-150.8	864.47	1364.4	218.27	911.15
9	8	1.369264	1.896753	1.890284	1.852969	0.9796	1.206159	1.056308	1.07679	1672.7	-513	456.53	1588.9	191.05	395.57	1269	-184.7	931.95	1343	233.59	853.45
10	9	1.556533	1.033244	1.3379	1.660803	1.022327	0.9058	1.899559	1.36002	1673.9	-537.3	477.23	1527.1	295.36	347.58	1417.6	-197.7	943.25	1312.9	268.62	967.07
11	10	1.83632	1.472753	1.581448	1.922219	1.464762	0.9429	1.830885	0.9224	1663.4	-357.4	537.14	1595.6	343.7	448.95	1434.9	-186.3	1020.6	1406.2	211.66	932.32
12	11	0.8422	1.218672	1.278213	1.479518	0.8976	1.111173	0.893	1.61168	1581.3	-462.8	483.05	1682.9	283.11	303.45	1445.6	-174.3	1011.9	1358.8	177.78	1040.3
13	12	1.061552	1.860397	1.207097	1.971497	1.714128	1.593747	1.622078	1.769832	1717.3	-412.1	507.08	1658	347.51	485.52	1393.7	-236.7	980.05	1281.8	122.52	1011.7
14	13	0.8827	1.395092	1.095507	1.531882	0.8287	1.442036	1.445199	1.127789	1588.1	-410.2	513.68	1519.5	244.75	340.65	1324.8	-246.5	946.23	1451.5	168.06	857.66
15	14	1.531263	0.9365	1.825241	1.113672	1.998521	1.739018	1.704025	1.877883	1696	-451.8	400.87	1602.5	182.03	400.2	1340.3	-143.6	1015	1379.4	106.88	902.08
16	15	1.91124	1.496588	0.9831	0.9181	1.34703	1.264247	1.409448	1.72614	1707.2	-478.5	554	1690	270.97	454.61	1310.8	-222.9	888.53	1318.4	135.68	1002.1
17	16	1.749045	0.8563	1.64287	1.426502	1.063402	1.553185	0.9786	0.9616	1657.7	-505.6	557.02	1539.4	188.26	494.94	1398.5	-85.27	999.59	1306.9	146.99	970.08
18	17	1.682613	1.977086	1.996713	1.071348	1.417979	1.530247	1.320683	1.230751	1622.9	-476.8	588.11	1565.4	360.39	363.91	1365.5	-119.5	913.1	1348.2	101.44	876.8
19	18	0.8024	1.280548	0.9458	1.762228	1.964904	1.668814	1.956498	1.578056	1680.9	-492.2	435.51	1610.9	276.76	311.83	1332.9	-155	890.31	1375.3	239.33	937.16
20	19	1.594436	0.8989	1.463031	1.345187	0.8611	1.798046	1.398932	1.971726	1603	-377.7	530.66	1681.3	313.76	382.34	1336.5	-70.4	882.37	1385.1	118.8	976.45
21	20	1.457536	1.77062	1.42144	1.749783	1.626398	1.001078	0.8226	1.685577	1608.6	-402.9	431.56	1578.5	290.04	413.35	1264.1	-131.3	924.81	1356.8	129.68	1017
22																					
23																					
24																					
25																					

2

samples

Ready

Samples

1. Set the Design as User-defined
2. Click Select Files
3. Select the CSV file samples.csv
4. Click Open
5. Click Import
6. The samples from the CSV file have been imported to the web app, the Samples table now has 20 samples

- On import, a summary is displayed in the green box. This summary lists each change that has been performed.

SOL 200 Web App - Machine Learning Parameters **Samples** Responses Download Results Connection Settings Home

Configure Samples → Samples to Run

Design
User-defined 1

+ Info

+ Options

CSV Export CSV Import

Export 2 Select files samples.csv 5 Import

CSV imported

Summary of successful updates. All other data untouched.

Sample	Parameter	CSV Value
1	x1	1.243348
1	x2	1.647636
1	x3	1.956198
1	x4	1.241524
1	x5	1.770668
1	x6	1.692281
1	x7	1.578241
1	x8	1.739021
1	x9	1.600000

File name: samples.csv 4 Open Cancel

Parameters

Sample Number	Status	x1	x2	x3	x4	x5	x6
6 1	✓	1.243348	1.647636	1.956198	1.241524	1.770668	1.692281
2	✓	1.201435	1.316138	1.553263	1.386487	1.80035	1.890000
3	✓	1.255096	1.8311	1.619651	0.8056	1.248585	1.156000
4	✓	1.96449	1.056862	1.29066	0.9567	1.682014	1.724000
5	✓	1.110327	1.69477	1.493055	0.8829	1.890345	1.515000

« 1 2 3 4 » 5 10 20 30 40 50

Responses

1. Click Responses
2. Click Select files
3. Select the indicated file
4. Click Open
5. Click Upload files

- On this page, the H5 file is uploaded to the web app.

1

Upload .h5 File

2

1. Select files


engine_mount.h5

5

2. Upload files

Uploading

Loading

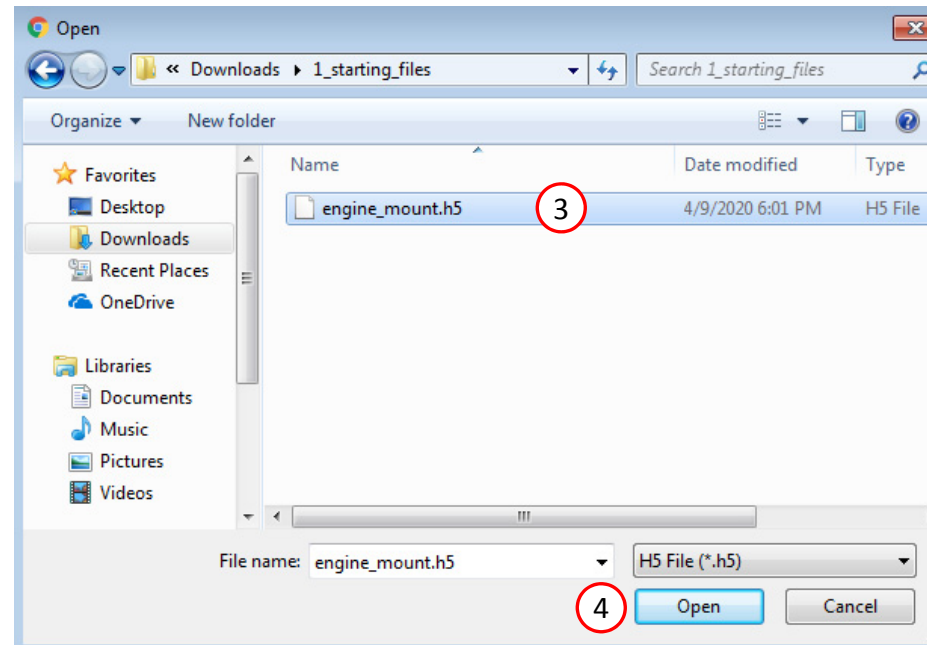

Adjust the Column Width

- 1. Optional - Use at your liking the buttons at the top right hand corner to adjust the width of the left and right columns

SOL 200 Web App - Machine LearningParametersSamplesResponsesDownloadResultsConnectionSettingsHome

Select Responses to MonitorSession ID: 3710HDF5

Select Dataset

NODAL/ACCELERATION

NODAL/DISPLACEMENT

NODAL/GRID_WEIGHT

NODAL/VELOCITY_CPL

SUMMARY/EIGENVALUE

Acquired Dataset

NODAL/GRID_WEIGHT - 0

SAMPLE	DOMAIN_ID	SUBCASE	STEP	ANA
--------	-----------	---------	------	-----

View Responses to Monitor

Monitored Responses

Hide/Show Columns

Reset Filters

Download CSV

Delete	Label	Status	Objective	Lower Bound	Upper Bound	Monitor th of the Fil cycle (SC
<div>✕</div>	r1	<div>⬆</div>	<div>⌵</div>	Lower	Upper	

SOL 200 Web App - Machine LearningParametersSamplesResponsesDownloadResultsConnectionSettingsHome

Select Responses to MonitorSession ID: 3710HDF5

Select Dataset

NODAL/ACCELERATION_CPLX

NODAL/DISPLACEMENT_CPLX

NODAL/GRID_WEIGHT

NODAL/VELOCITY_CPLX

SUMMARY/EIGENVALUE

Specify Entities

0

(ID)

Examples: 0, etc.

Acquired Dataset

NODAL/GRID_WEIGHT - 0

SAMPLE	DOMAIN_ID	SUBCASE	STEP	ANALYSIS	TIME_FREQ_EIGR
--------	-----------	---------	------	----------	----------------

lame of H5 File**

Subcase number

Step number

Analysis type

Time, frequency or real part of eigen value

Im

eig

api

model		0	0	0	0
-------	--	---	---	---	---

View Responses to Monitor

Monitored Responses

Hide/Show Columns

Reset Filters

Download CSV

Delete	Label	Status	Objective	L B
<div>✕</div>	r1	<div>⬆</div>	<div>⌵</div>	Lc

5

10

20

30

50

100

Select Responses

1. Select the following dataset:
OPTIMIZATION/OBJECTIVE
2. Select the indicated cell, a new response r1 is created
3. Select the indicated cell, a new response r2 is created
4. Ensure Yes is set for both responses

- Refer to the Appendix for an explanation on the use of the following:
 - Monitor the response of the FINAL design cycle (SOL 200): Yes

Select Responses to Monitor

Session ID: 1618 HDF5

Select Dataset

NODAL/ACCELERATION_CPLX
OPTIMIZATION/GRIDNEW
OPTIMIZATION/HISTORY
OPTIMIZATION/LABEL
OPTIMIZATION/OBJECTIVE

Specify Entities

13.352238896408855, 13.356553020712

Exact from analysis (EXACT)

Examples: 13.352238896408855,
13.356553020712388, 13.70793612781801, etc.

☒ Auto Execute

Acquire Dataset

Acquisition complete and successful

Acquired Dataset

OPTIMIZATION/OBJECTIVE - 13.352238896408855, 13.356553020712388, 1...

EXACT	APPRX	MAXIM	SAMPLE	DOMA
Exact from analysis	Optimal w.r.t. appoximation	Maximum values of constraints	Name of H5 File**	Don iden
27.0322586...	0	NaN	engine_...	613
27.0709940...	22.9262668...	NaN	engine_...	71
22.7...	22.5290287...	NaN	engine_...	108
19.9838294...	19.0269765...	NaN	engine_...	144
20.3487026...	17.1816851...	NaN	engine_...	180
18.6515668...	17.91711109...	NaN	engine_...	216

View Responses to Monitor


Monitored Responses

Hide/Show Columns Reset Filters Download CSV

Delete	Label	Status	Objective	Lower Bound	Upper Bound	Monitor the response of the FINAL design cycle (SOL 200 only)
<input checked="" type="checkbox"/>	r1	<input checked="" type="checkbox"/>		Lower	Upper	Yes - Monitor respon
<input checked="" type="checkbox"/>	r2	<input checked="" type="checkbox"/>		Lower	Upper	Yes - Monitor respon

Download


1. Click Download
2. Click Download BDF Files

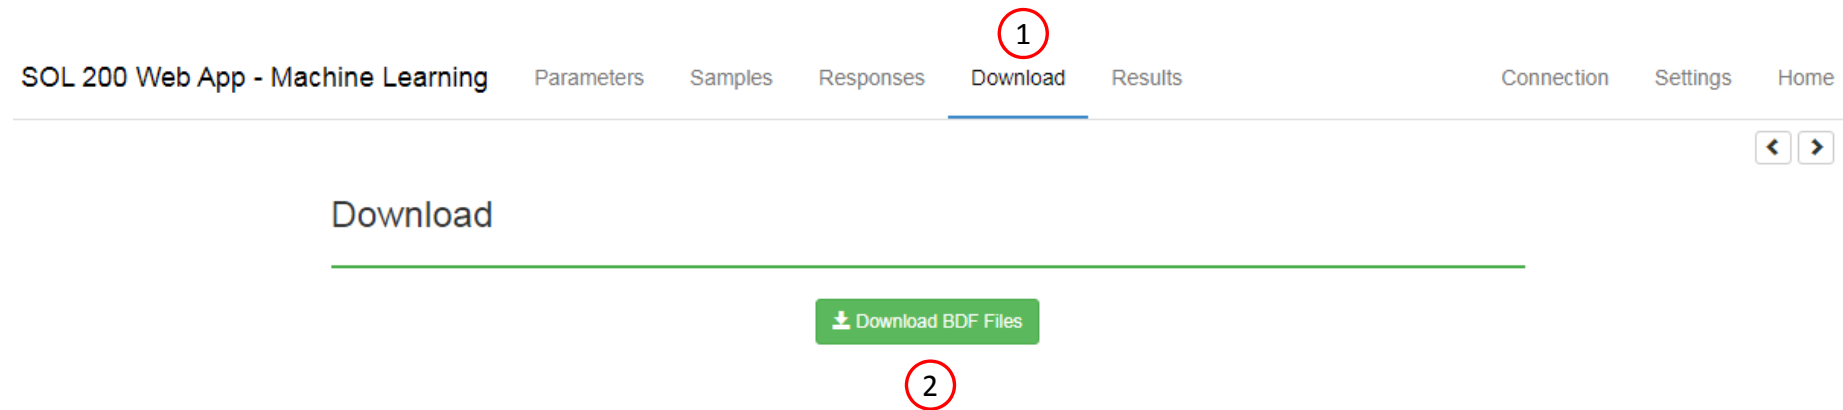

Start MSC Nastran

1. A new .zip file has been downloaded
2. Right click on the file
3. Click Extract All
4. Click Extract on the following window

- Always extract the contents of the ZIP file to a new, empty folder.

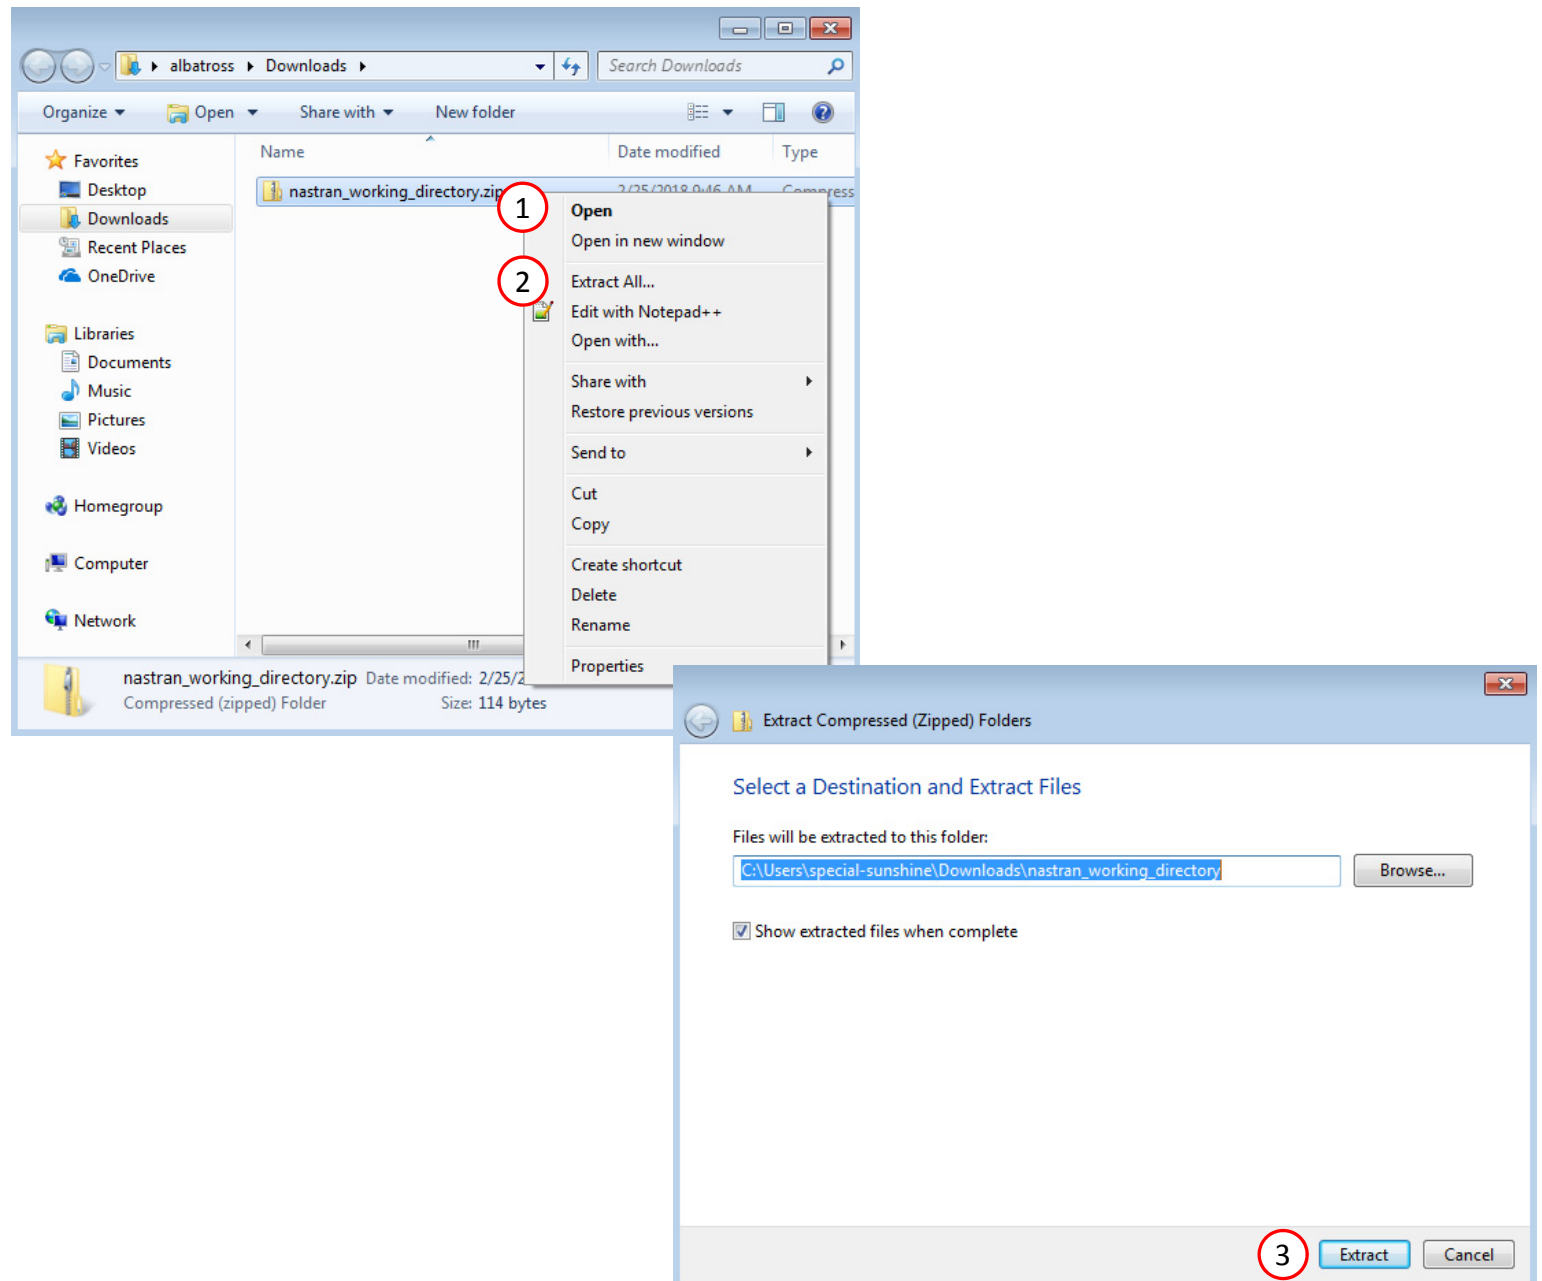

Start MSC Nastran

1. Inside of the new folder, double click on Start Desktop App
2. Click Open, Run or Allow Access on any subsequent windows
3. MSC Nastran will now start

- One can run the Nastran job on a remote machine as follows:
 - 1) Copy the BDF files and the INCLUDE files to a remote machine.
 - 2) Run the MSC Nastran job on the remote machine.
 - 3) After completion, copy the BDF, F06, LOG, H5 files to the local machine.
 - 4) Click "Start MSC Nastran" to display the results.




Using Linux?

Follow these instructions:

- 1) Open Terminal
- 2) Navigate to the nastran_working_directory
`cd ./nastran_working_directory`
- 3) Use this command to start the process
`./Start_MSC_Nastran.sh`

In some instances, execute permission must be granted to the directory. Use this command. This command assumes you are one folder level up.

```
sudo chmod -R u+x ./nastran_working_directory
```

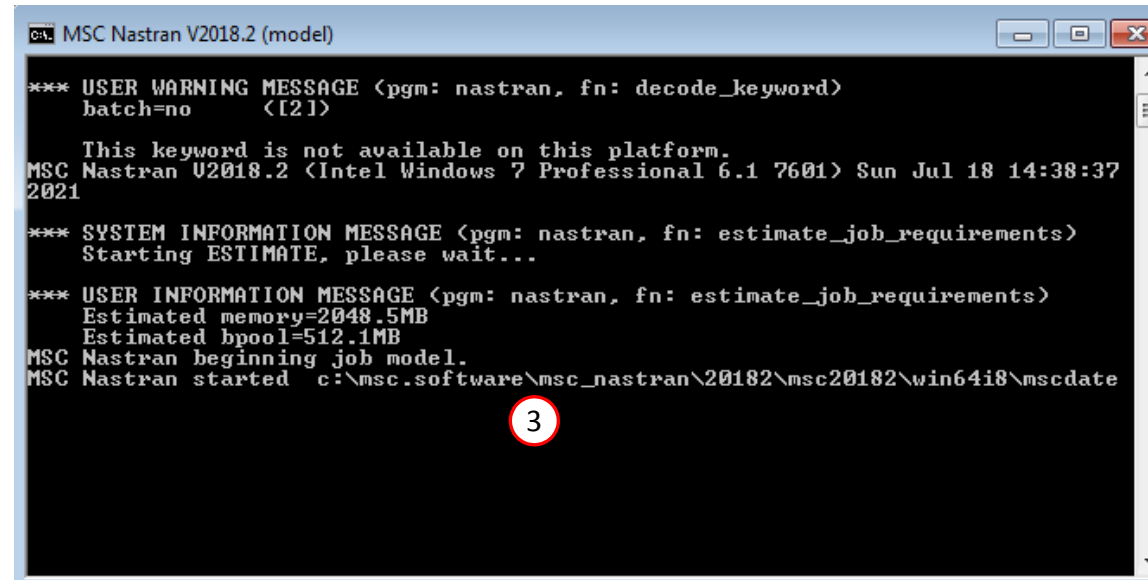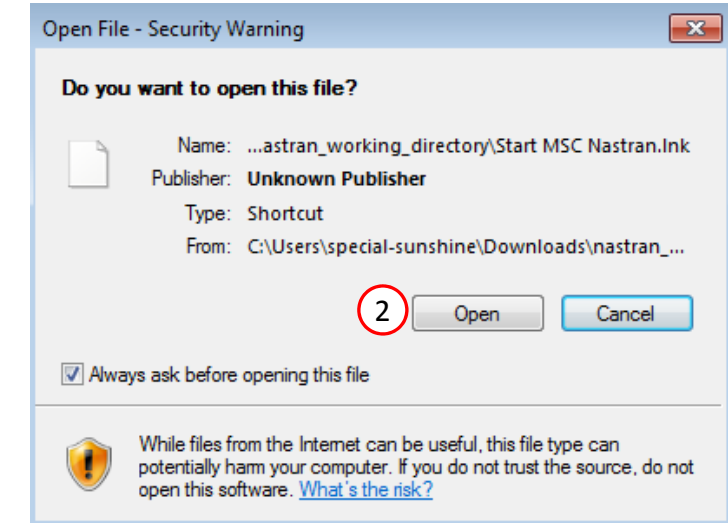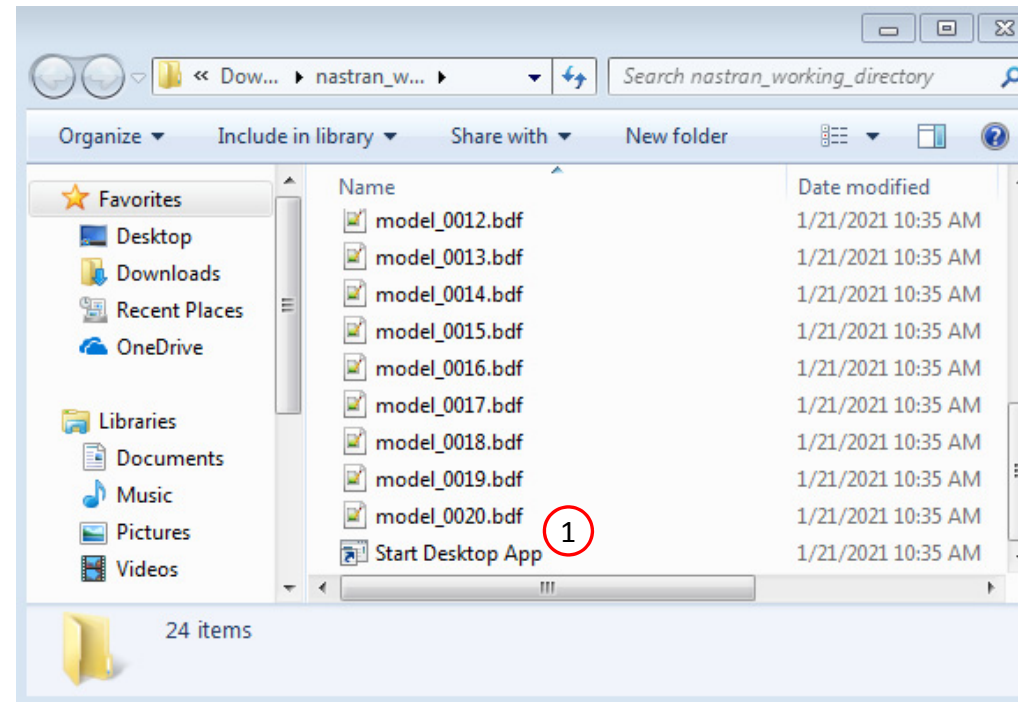

Status

- While MSC Nastran is running, a status page will show the current state of MSC Nastran

SOL 200 Web App - Status

 Python

 MSC Nastran


Status

Name	Status of Job	Design Cycle	RUN TERMINATED DUE TO
model.bdf	Running	None	

Results

After each MSC Nastran analysis is complete, multiple web apps are automatically opened to display the results.

1. Use the tabs to switch between each web app
2. A description of each web app is given in the table.

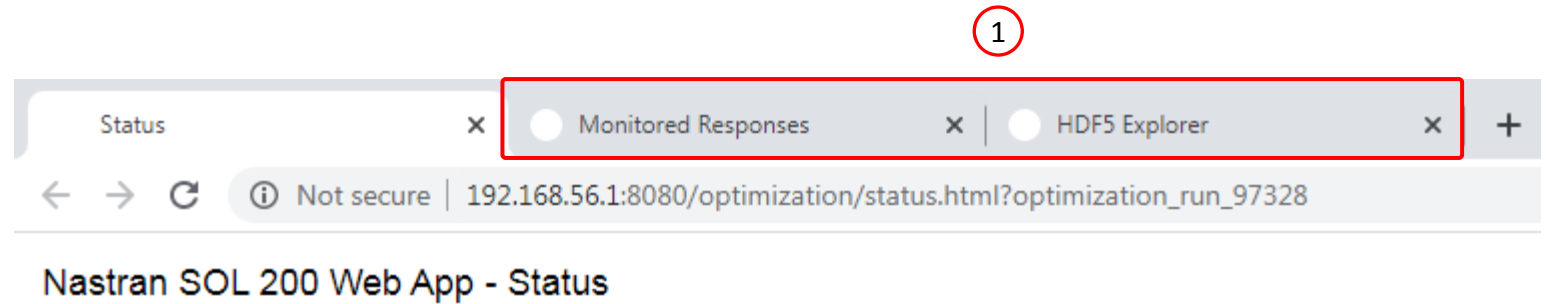

Name of Web App	Purpose	Description
Monitored Responses	<ul style="list-style-type: none">• The response value from each sample can be compared.	<ul style="list-style-type: none">• After each MSC Nastran analysis, the response values are extracted from the H5 file and contained in a file named app_monitored_responses.csv. The Monitored Responses web app is used to create a bar chart of the values contained in this CSV file.
HDF5 Explorer	<ul style="list-style-type: none">• This web app is used to probe each H5 file and generate XY plots.	


Difference in Results

- It is likely the results you obtain are different from those shown in this tutorial. The differences can be due to many factors, some of which include:
 - Using Linux or Windows operating systems
 - Using a different version of MSC Nastran
- The results show in this tutorial were produced by a Windows 7 environment running MSC Nastran 2018. Different environments may produce slightly different results.

Review Results

- 1. The Monitored Responses web app is opened
- 2. The r1 response corresponds to the Max Normalized Constraint of the last design cycle, or FINAL design. For this tutorial, the r1 response is reported as "nan" indicating the response is empty. The optimization did not have any design constraints defined, i.e. no DCONSTR entries were defined, so there were no normalized constraints to report and are listed as empty or "nan." The r1 response is not necessary for this tutorial, but was configured so the user is aware of the process to track the Max Normalized Constraint of the last design cycle.

- A. The table titled Monitored Response can be interacted with. Each column in the table contains filters. Once a filter is modified, the Bar Chart will instantly update.
- B. Additional functions include the ability to highlight the MAX and MIN bars, download a CSV file and reset the filters.

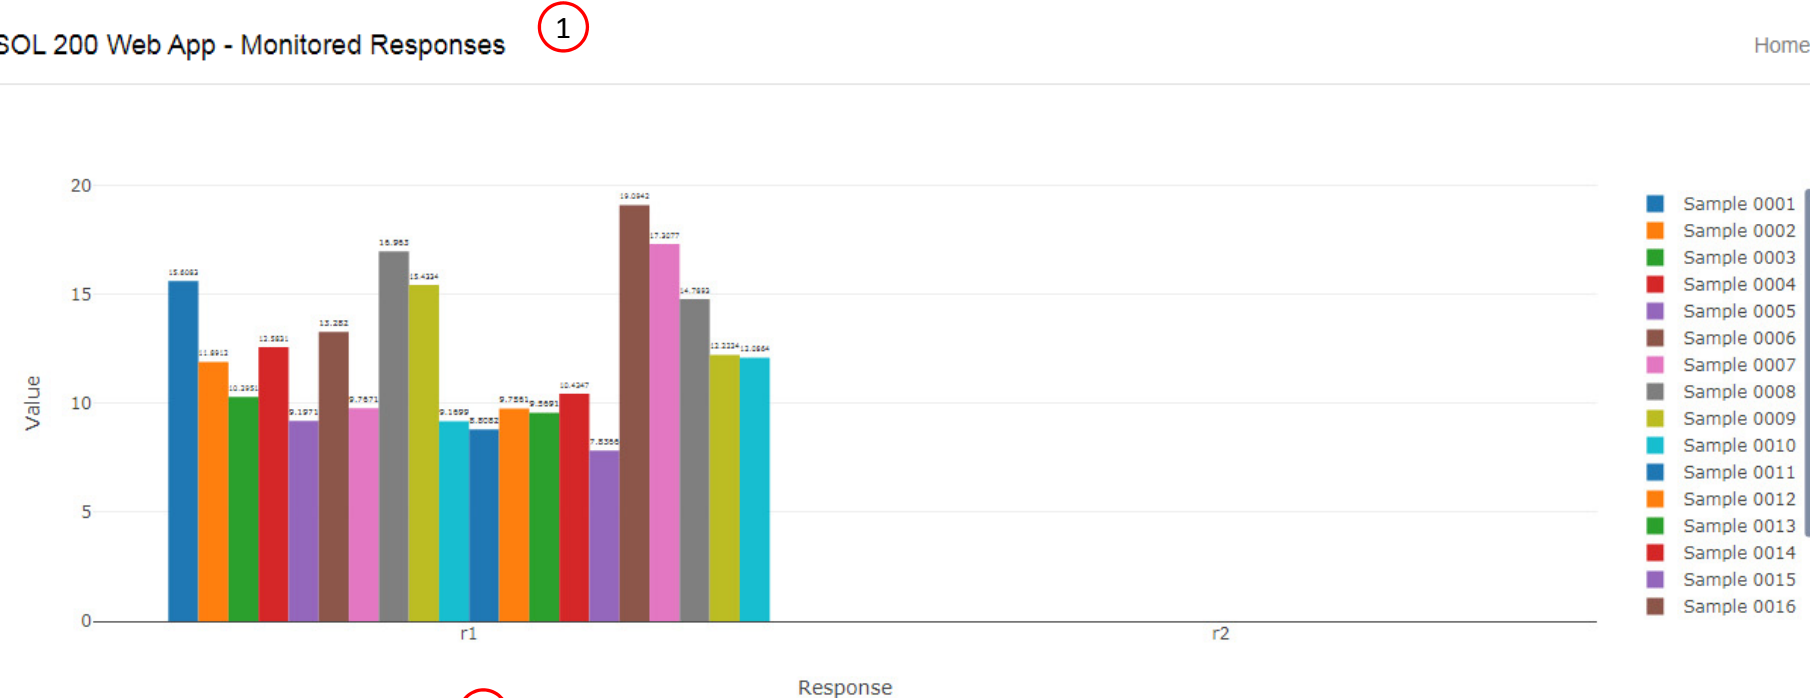

B

Monitored Responses			
<div>Display MAX and MINDownload CSVReset Filters</div>			
Label	Dataset Name	Field	Field Description
r1 r2	OPTIMIZATION/OBJECTIVE	EXACT MAXIM	Exact from analysis Maximum values of constraints
r1	OPTIMIZATION/OBJECTIVE	EXACT	Exact from analysis
r2	OPTIMIZATION/OBJECTIVE	MAXIM	Maximum values of constraints


510203050100

Monitored Responses from Each Sample			
0001	0002	0003	0004
15.608307348441018	11.891231588105237	10.295095395470057	12.583072653377371
nan	nan	nan	nan

2

1. In the filters, select only response r1
2. Move the mouse cursor to the top number of the vertical axis
3. Single click the number
4. A new value can be supplied, type 10.00 press the Enter key
5. The range of the vertical axis has now been adjusted to be between 0 and 10
6. After inspection, the lowest responses are yielded by samples 0011 and 0015

SOL 200 Web App - Monitored Responses



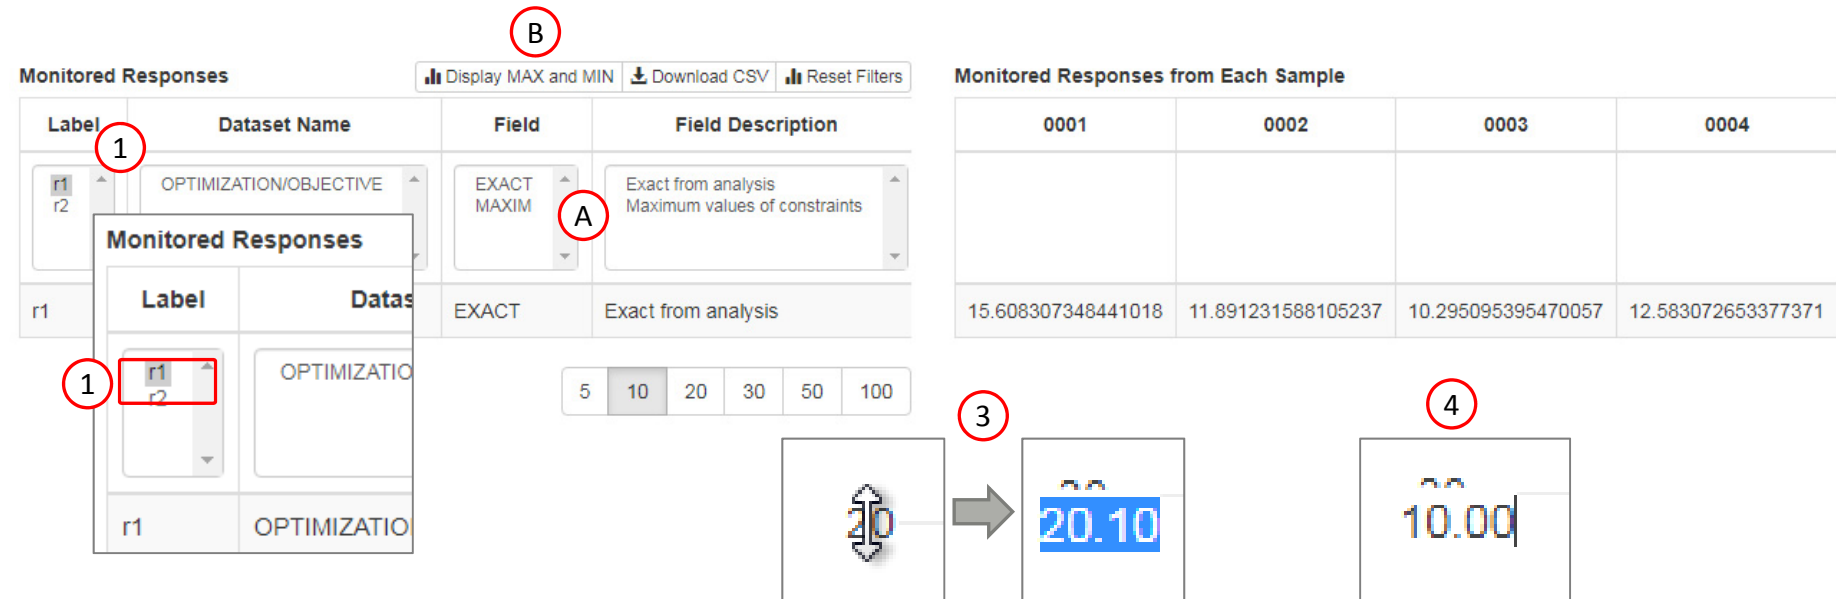


Review Results

1. A new window is opened
2. Select all 20 H5 files
3. Click Continue
4. The HDF5 Explorer is automatically opened.
5. Click the indicate image

The HDF5 Explorer is broken into sections.

- Acquire Dataset – Specific datasets from the H5 file can be extracted in this section.
- Plots Browser – Use this section to navigate every plot created.
- Combine Plots – This section allows you to combine multiple plots. For example, you can create Load vs. Displacement plots in this section.
- Last Plot Added – The Acquire Dataset section has a button titled “Create Plot.” This button, when clicked, creates a new plot. When the link “Last Plot Added” is clicked, the new plot is displayed.

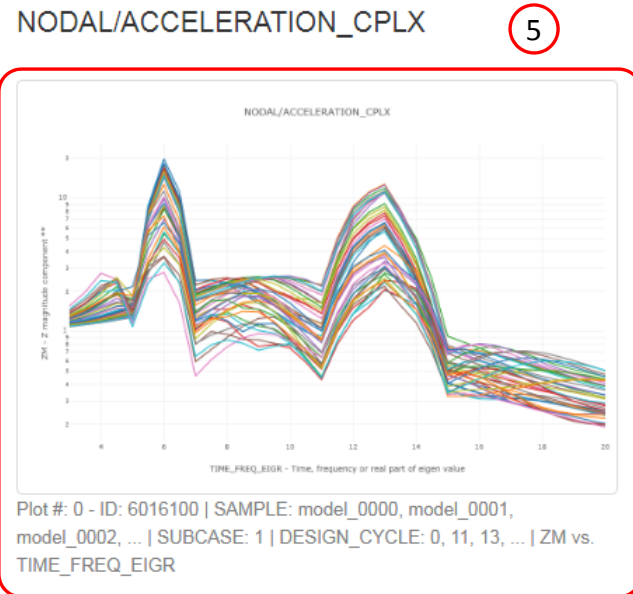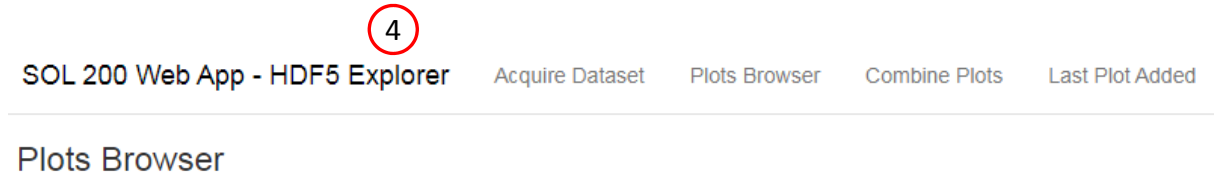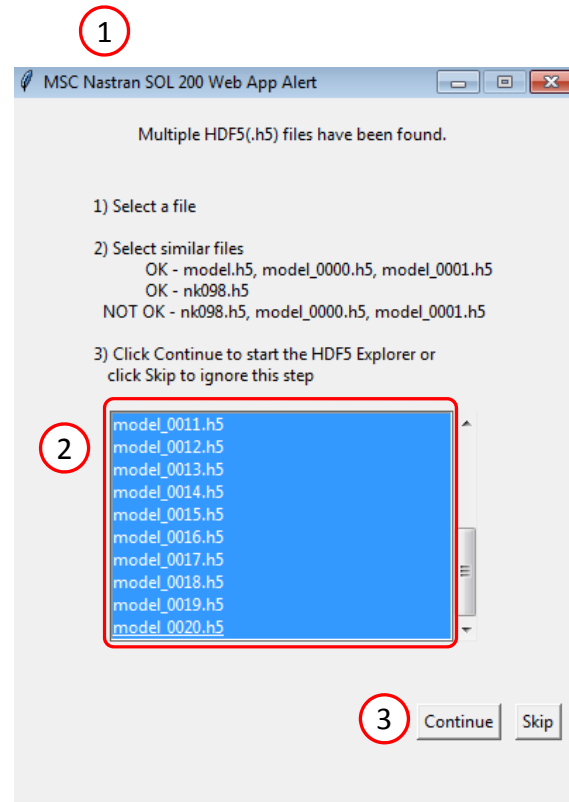

Plot - NODAL/ACCELERATION_CPLX

Plot #: 0 - ID: 6016100 | SAMPLE: model_0001, model_0002, model_0003, ... | SUBCASE: 1 | DESIGN_CYCLE: 0, 9, 11, ... | ZM vs. TIME_FREQ_EIGR



Vertical Axis




ZM - Z magnitude component **

Horizontal Axis

TIME_FREQ_EIGR - Time, freq

+ Options

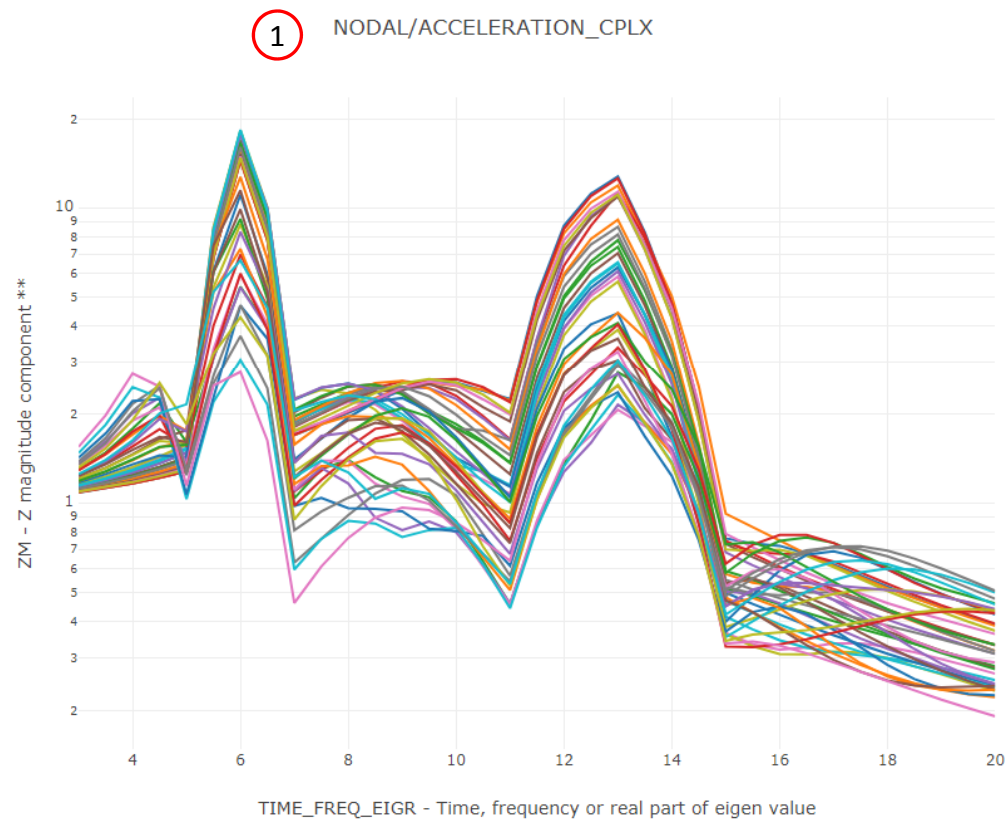☐ Display None ☒ Display All

Display	Color	Name
<input checked="" type="checkbox"/>	Blue	0 - ID: 6016100 SAMPLE: model_0001 SUBCASE: 1 DESIGN_CYCLE: 0
<input checked="" type="checkbox"/>	Orange	1 - ID: 6016100 SAMPLE: model_0002 SUBCASE: 1 DESIGN_CYCLE: 0
<input checked="" type="checkbox"/>	Green	2 - ID: 6016100 SAMPLE: model_0003 SUBCASE: 1 DESIGN_CYCLE: 0
<input checked="" type="checkbox"/>	Red	3 - ID: 6016100 SAMPLE: model_0004 SUBCASE: 1 DESIGN_CYCLE: 0
<input checked="" type="checkbox"/>	Purple	4 - ID: 6016100 SAMPLE: model_0005 SUBCASE: 1 DESIGN_CYCLE: 0
<input checked="" type="checkbox"/>	Brown	5 - ID: 6016100 SAMPLE: model_0006 SUBCASE: 1 DESIGN_CYCLE: 0
<input checked="" type="checkbox"/>	Pink	6 - ID: 6016100 SAMPLE: model_0007 SUBCASE: 1 DESIGN_CYCLE: 0
<input checked="" type="checkbox"/>	Grey	7 - ID: 6016100 SAMPLE: model_0008 SUBCASE: 1 DESIGN_CYCLE: 0
<input checked="" type="checkbox"/>	Yellow	8 - ID: 6016100 SAMPLE: model_0009 SUBCASE: 1 DESIGN_CYCLE: 0
<input checked="" type="checkbox"/>	Cyan	9 - ID: 6016100 SAMPLE: model_0010 SUBCASE: 1 DESIGN_CYCLE: 0
<input checked="" type="checkbox"/>	Dark Blue	10 - ID: 6016100 SAMPLE: model_0011 SUBCASE: 1 DESIGN_CYCLE: 0
<input checked="" type="checkbox"/>	Light Orange	11 - ID: 6016100 SAMPLE: model_0012 SUBCASE: 1 DESIGN_CYCLE: 0
<input checked="" type="checkbox"/>	Dark Green	12 - ID: 6016100 SAMPLE: model_0013 SUBCASE: 1 DESIGN_CYCLE: 0
<input checked="" type="checkbox"/>	Dark Red	13 - ID: 6016100 SAMPLE: model_0014 SUBCASE: 1 DESIGN_CYCLE: 0
<input checked="" type="checkbox"/>	Dark Purple	14 - ID: 6016100 SAMPLE: model_0015 SUBCASE: 1 DESIGN_CYCLE: 0
<input checked="" type="checkbox"/>	Dark Brown	15 - ID: 6016100 SAMPLE: model_0016 SUBCASE: 1 DESIGN_CYCLE: 0

2

[+ View Filters and Plotted Values](#)

Review Results

1. An Acceleration vs Frequency plot is displayed, but displays the INITIAL and FINAL results of each sample
2. Click + View Filters and Plotted Values

Review Results

Previously, samples 0011 and 0015 have been identified for further study

1. Use the SAMPLE filter and only select the following samples (Hold down the CTRL key on the keyboard to select multiple options):
 - model_0011
 - model_0015

[+ View Filters and Plotted Values](#)

Filters



SAMPLE

Name of H5 File**

model_0011
model_0012
model_0013
model_0014
model_0015
model_0016

1

DESIGN_CYCLE

Design cycle

0
9
11
13
16
17

Plotted Values

[Download CSV](#)


		Horizontal Axis (TIME_FREQ_EIGR - Time, frequency or real part of eigen value)							
		Show Max Peaks	3	3.4999999999999996	4	4.5	5	5.5	6
0 - ID: 6016100 SAMPLE: model_0011 SUBCASE: 1 DESIGN_CYCLE: 0	<input type="checkbox"/>	1.1384940358736...	1.196752442525858	1.2705727693358...	1.363815697541142	1.480728591185385	8.107165829324089	17.826286662784...	9.9378
1 - ID: 6016100 SAMPLE: model_0015 SUBCASE: 1 DESIGN_CYCLE: 0	<input type="checkbox"/>	1.1389285353146...	1.1969834355280...	1.270125745885131	1.3617835254730...	1.4760752396297...	8.085840714337646	17.891243584181...	10.000
2 - ID: 6016100 SAMPLE: model_0015 SUBCASE: 1 DESIGN_CYCLE: 23	<input type="checkbox"/>	1.476998427280743	1.8384112798793...	2.4623895858380...	2.269856249616177	1.032462719479684	2.1964288719687...	3.056634876403101	2.1493
3 - ID: 6016100 SAMPLE: model_0011 SUBCASE: 1 DESIGN_CYCLE: 30	<input type="checkbox"/>	1.5486237548469...	1.97925979467711...	2.7372323407854...	2.472964838298732	1.1466197363508...	2.492930583266693	2.7729273449831...	1.6253

10 25 50 100

Review Results

1. After the SAMPLE is modified, the plot now shows data for only samples 0011 and 0015
2. Click + Options
3. Set Vertical Axis Format as Linear
4. Un-check the indicated checkboxes
5. The 3rd trace (The FINAL result of sample 0015) is shown to have the smallest max peak between samples 0011 and 0015

- On this slide, the following is plotted:
 - The FINAL results from samples
 - 0011
 - 0015

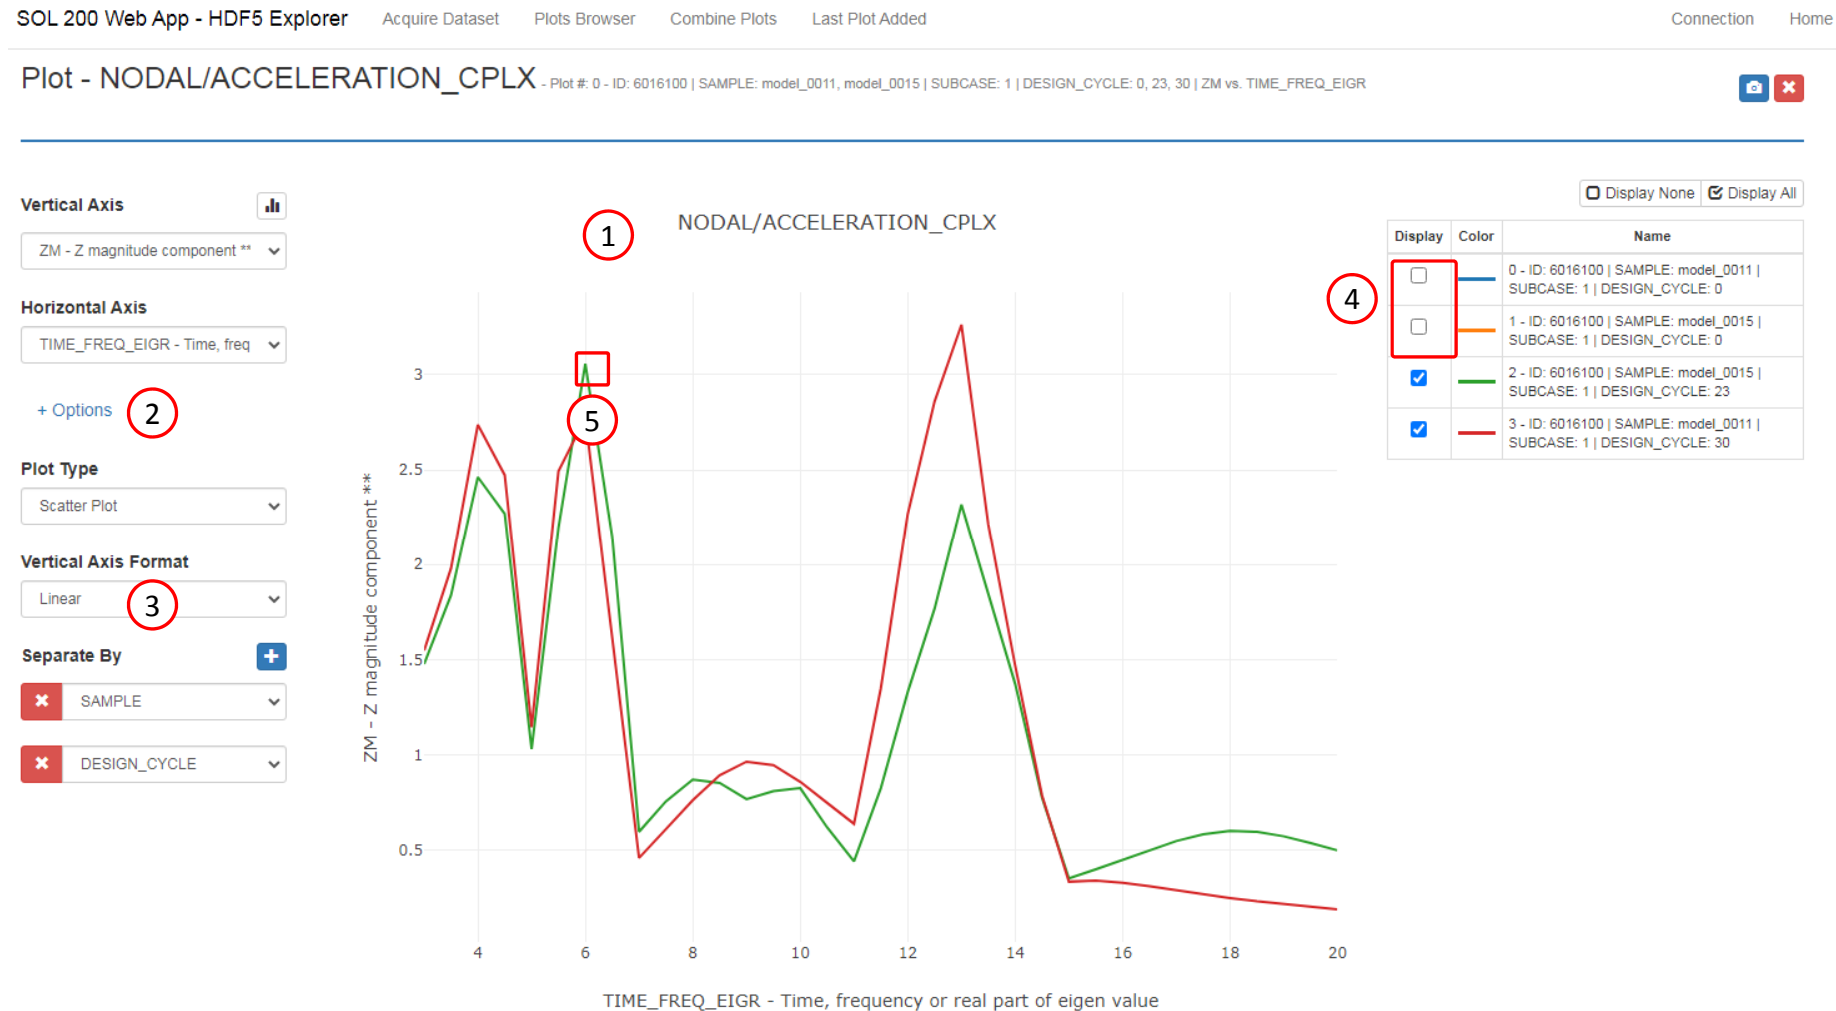

1. Click Acquire Dataset
2. Select OPTIMIZATION/OBJECTIVE
3. Click Create Plot

1. Click Acquire Dataset
2. Select OPTIMIZATION/OBJECTIVE
3. Click Create Plot

- Questions? Email: christian@the-engineering-lab.com

1

SOL 200 Web App - HDF5 Explorer

Acquire Dataset

Plots Browser

Combine Plots

Last Plot Added

Acquire Dataset

2

Select Dataset

OPTIMIZATION/ACCELERATION/CPLEX
OPTIMIZATION/GRIDNEW
OPTIMIZATION/HISTORY
OPTIMIZATION/LABEL
OPTIMIZATION/OBJECTIVE
OPTIMIZATION/RESPONSE/RTYPE1/FRACTI...

Specify Entities

13.352237904586175, 13.356556797059337, 13.707936...

Exact from analysis (EXACT)
Examples: 13.352237904586175, 13.356556797059337, 13.707936476952788, etc.

☒ Auto Execute

Acquire Dataset

Acquisition complete and successful

3

Acquired Dataset

OPTIMIZATION/OBJECTIVE - 13.352237904586175, 13.356556797059337, 13.707936476952788, 1...

Create Plot

Reset Filters

Download CSV

EXACT	APPRX	MAXIM	SAMPLE	DOM
Exact from analysis	Optimal w.r.t. approximation	Maximum values of constraints	Name of H5 File**	Domain
			model_00 model_00 model_00 model_00	
27.032258623173	0	NaN	model_0000	613
27.678594041564...	22.936955662221...	NaN	model_0000	71
22.76158277965619	22.52901275842161	NaN	model_0000	108
19.983829425495...	19.026982653532...	NaN	model_0000	144
20.349702630794...	17.1815485601328	NaN	model_0000	180
18.651568867325...	17.917113654403...	NaN	model_0000	216
18.19532363627511	17.609469813041...	NaN	model_0000	252
18.840295489484...	16.86520533445936	NaN	model_0000	288
17.729428044472...	17.423046148014...	NaN	model_0000	324
16.894760053881...	16.96426983266942	NaN	model_0000	360
15.919436438376...	16.056543435451...	NaN	model_0000	396
14.734995874480...	14.876618596296...	NaN	model_0000	432

Review Results

1. Click Last Plot Added
2. Click + View Filters and Plotted Values
3. Similar to before, for the SAMPLE filter select only samples:
 - model_0011
 - model_0015
4. The objective histories for each local optimization is displayed

Plot - OPTIMIZATION/OBJECTIVE

Vertical Axis


EXACT - Exact from analysis

Horizontal Axis

DESIGN_CYCLE - Design cycle

+ Options

OPTIMIZATION/OBJECTIVE

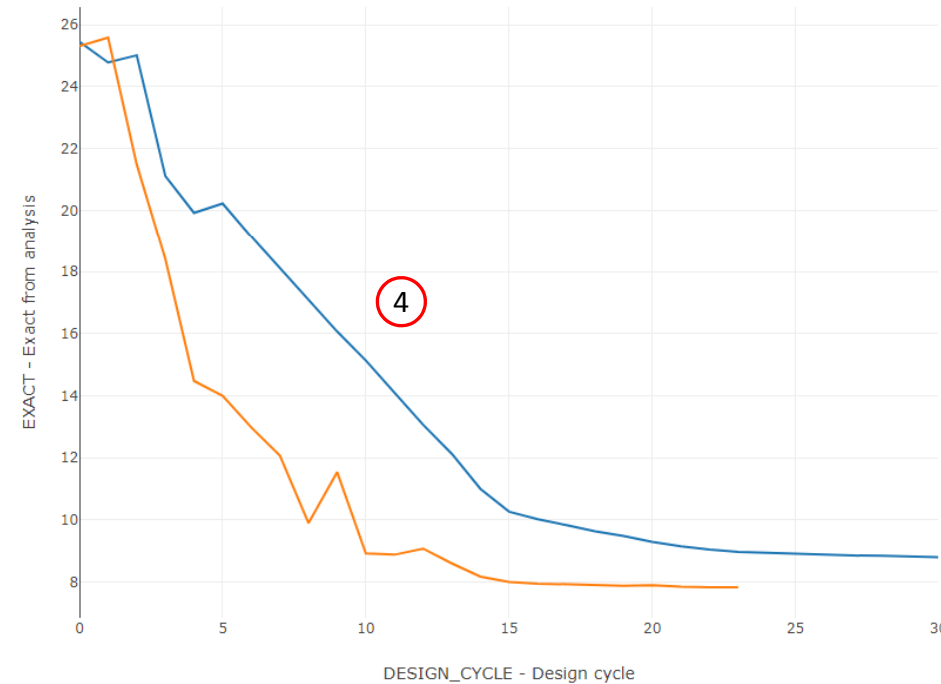☐ Display None ☒ Display All

Display	Color	Name
<input checked="" type="checkbox"/>	Blue	0 - SAMPLE: model_0011 DESIGN_CYCLE: 0, 1, 2, ...
<input checked="" type="checkbox"/>	Orange	1 - SAMPLE: model_0015 DESIGN_CYCLE: 0, 1, 2, ...

Filters

SAMPLE

Name of H5 File**

model_0010
model_0011
model_0012
model_0013
model_0014
model_0015

Plotted Values

Name	Show Max Peaks	Horizontal Axis (DESIGN_CYCLE - Design cycle)							
		0	1	2	3	4	5	6	
0 - SAMPLE: model_0011 DESIGN_CYCLE: 0, 1, 2, ...	<input type="checkbox"/>	25.457461213841...	24.785255073838...	25.01908302330418	21.110958256483...	19.922181212248...	20.223406280852...	19.137769941397...	18
1 - SAMPLE: model_0015 DESIGN_CYCLE: 0, 1, 2, ...	<input type="checkbox"/>	25.317365270735...	25.59261489311217	21.489192827802...	18.401002656642...	14.477119166297...	13.99724269293456	12.980893728581...	12

End of Tutorial

Appendix

Appendix Contents

Response Configuration

- Monitor the response of the FINAL design cycle (SOL 200 only): Yes, No or blank

Equivalent Global Optimization

How to import and edit previous parameter studies


Monitor the response of the FINAL design cycle (SOL 200 only)

- A. When the option is *blank* or set to *No*, the monitored response is that of the design cycle listed. In this example, the response of design cycle 0 is monitored. The value of r1 is 1.0.

Delete	Label	Status	Objective	Lower Bound	Upper Bound	Monitor the response of the FINAL design cycle (SOL 200 only)	Monitor the maximum or minimum response, whichever has the greatest absolute value	Dataset Name
	r1			Lower	Upper			OPTIMIZATION/OBJECTIVE

- B. When the option is set to *Yes*, the monitored response is that of the FINAL design cycle. In this example, the response of design cycle 10 is monitored. The value of r1 is .679.


Delete	Label	Status	Objective	Lower Bound	Upper Bound	Monitor the response of the FINAL design cycle (SOL 200 only)	Monitor the maximum or minimum response, whichever has the greatest absolute value	Dataset Name
	r1			Lower	Upper	Yes - Monitor respo		OPTIMIZATION/OBJECTIVE

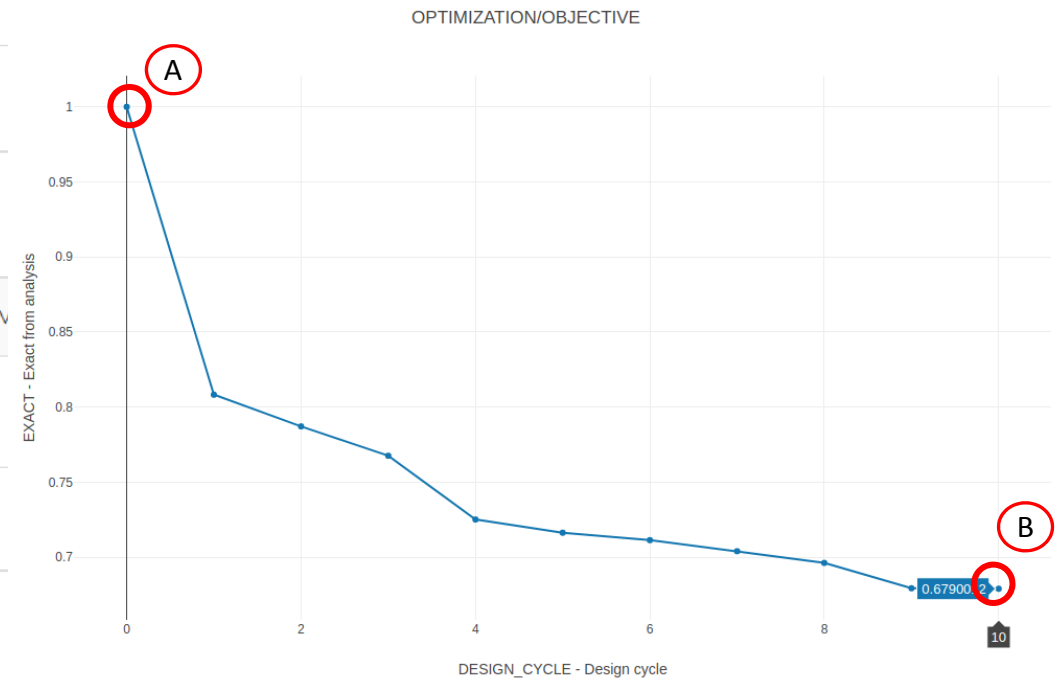

Monitor the response of the FINAL design cycle (SOL 200 only), Continued

Since the *Monitor the response of the FINAL design cycle (SOL 200 only)* is set to *Yes*, the response r1 takes the value of the last design cycle. The HDF5 Explorer is used to create an XYPLOT of the objective history, and the Monitored Responses web app is used to view the response value that was extracted.


Objective History

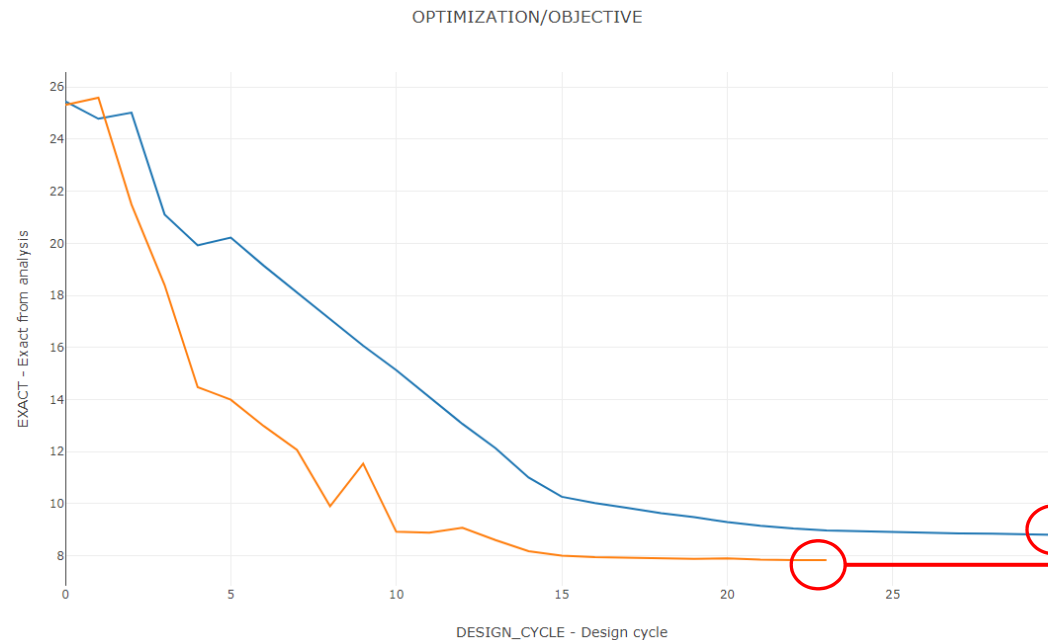

Monitored Response r1

Nastran SOL 200 Web App - Monitored Responses

Home

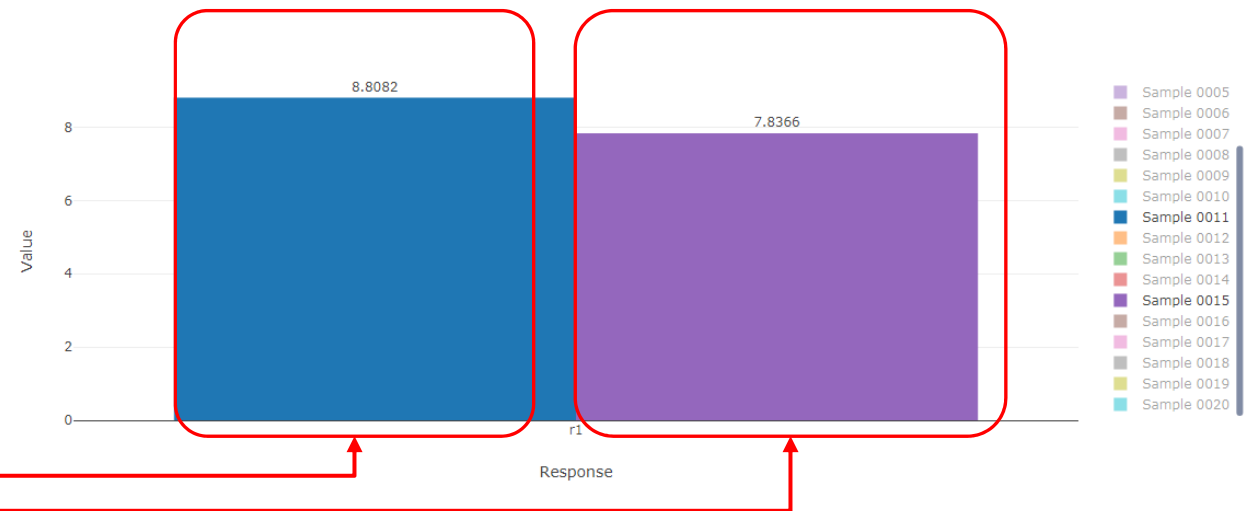

Equivalent Global Optimization

A Global Optimization is characterized as follows:

- A local optimization is performed at different starting, or initial, values for the variables
- The best final objective from all the local optimizations is taken as the global optimum.

This tutorial is equivalent to performing a global optimization

- The original BDF files are configured to perform a local optimization with MSC Nastran SOL 200. The Samples section is used to configure multiple local optimizations at different starting values for the variables.
- The Response section is used to monitor the objective and max normalized constraint from each local optimization

How to import and edit previous parameter studies

How to import and edit previous parameter studies

The parameters, samples and responses are contained in the following files


- app.config
- BDF files

These files may be imported back to the Parameter Study web app, and any parameters, samples and responses can be reconfigured

Import

1. Return to the window or tab that has the Machine Learning web app opened
2. Refresh the web page to start a new session

- Refreshing the page is only required when the *Select files* button is disabled.


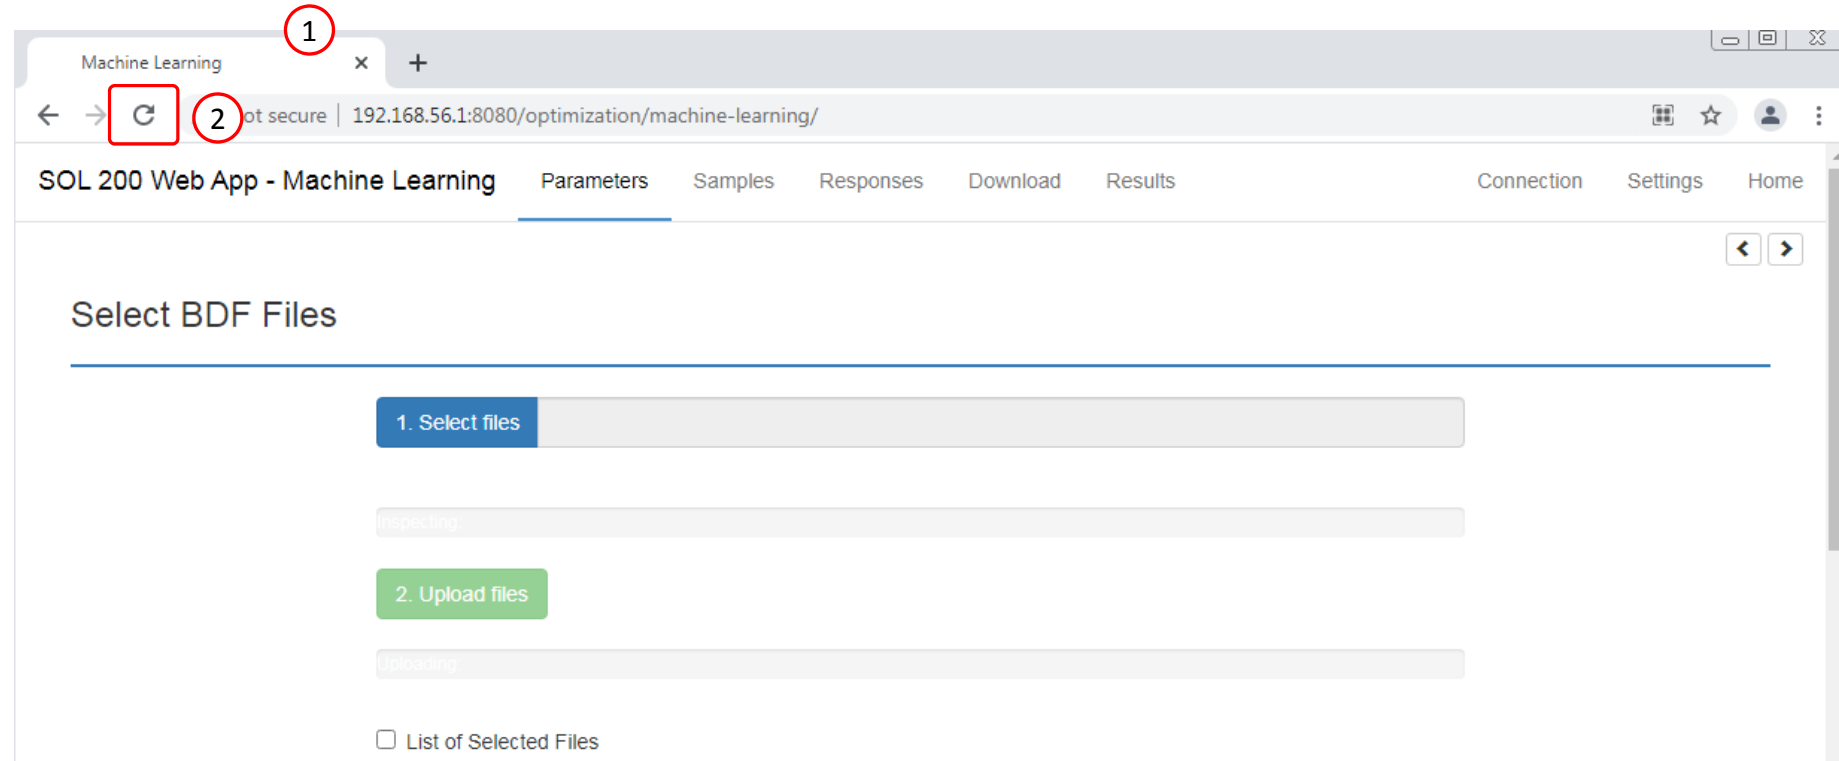


Import

1. Click Select Files
2. Navigate to the folder named nastran_working_directory
3. Select all the BDF files AND the app.config file.
4. Click Open

- All imports require the app.config file to be selected.

Select BDF Files

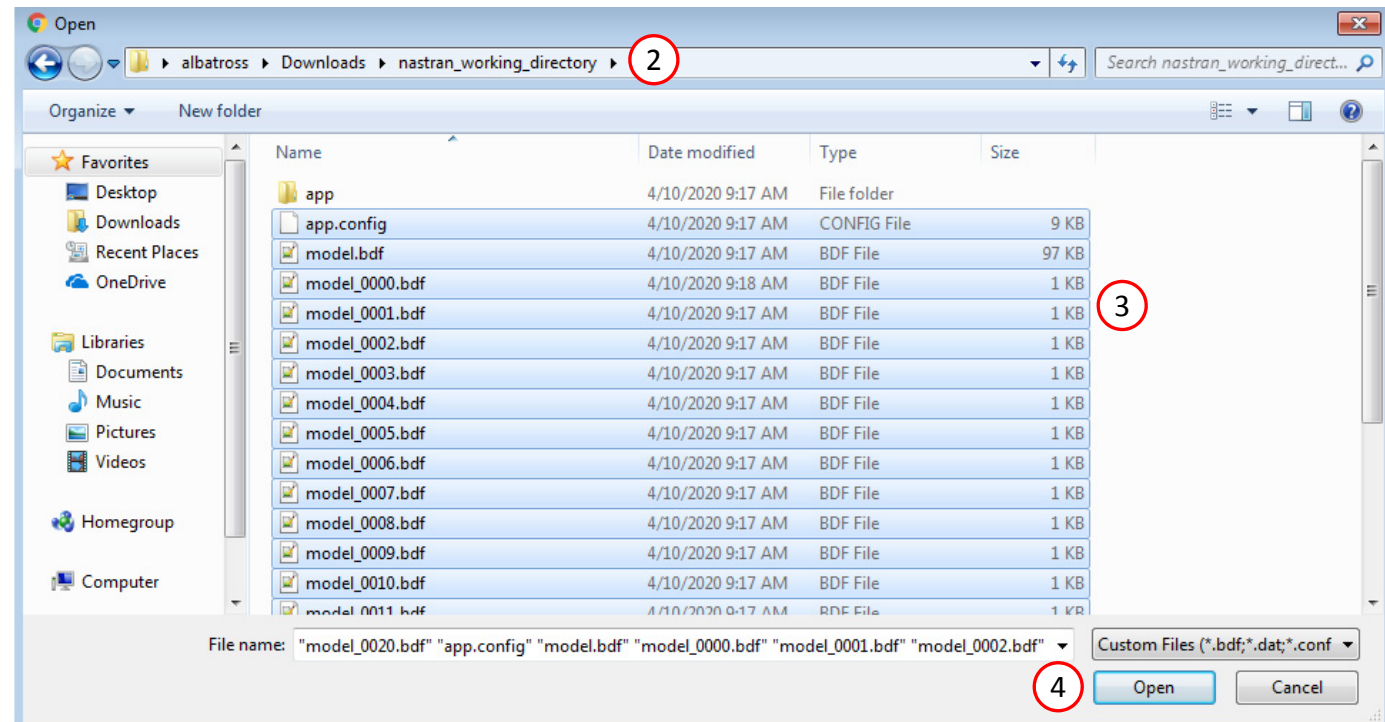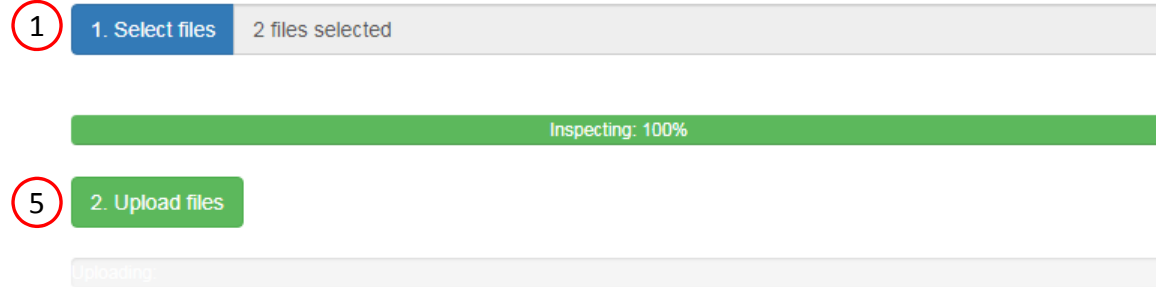

Import

For the Response section, the H5 file will need to be re-uploaded.

1. Click Responses
2. Select the H5 file
3. Click Upload
4. Data from the H5 is loaded and ready to use

SOL 200 Web App - Machine Learning Parameters Samples **Responses** Download Results Connection Settings Home

Upload .h5 File

1. Select files engine_mount.h5

2. Upload files

View Responses to Monitor

Monitored Responses

Hide/Show Columns Reset Filters Download CSV

Delete	Label	Status	Objective	Lower Bound	Upper Bound
	r1 r2				

SOL 200 Web App - Machine Learning Parameters Samples **Responses** Download Results Connection Settings Home

Select Responses to Monitor Session ID: 1411 HDF5

View Responses to Monitor

Monitored Responses

Hide/Show Columns Reset Filters Download CSV

Select Dataset

NODAL/ACCELERATION_CPLX - 6016100

Specify Entities

6016100

Auto Execute

ID	XR	YR
Grid identifier	X real component	Y real component
6016100	-0.01106377...	-0.00904857...

Delete	Label	Status	Objective	Lower Bound	Upper Bound
	r1 r2				
✕	r1	✓		Lower	Upper
✕	r2	✓		Lower	Upper

Import

After import, any Parameter, Samples or Responses can be modified.



Select BDF Files

1. Select files 2 files selected

Inspecting: 100%

2. Upload files

Uploading: 100 %

☐ List of Selected Files

Select Parameters

DESVAR	6016011	Trans_KX% x1%	.80000	2.00000	
DESVAR	6016012	Trans_KY% x2%	.80000	2.00000	
DESVAR	6016013	Trans_KZ% x3%	.80000	2.00000	
DESVAR	6016021	EngineKX% x4%	.80000	2.00000	
DESVAR	6016022	EngineKY% x5%	.80000	2.00000	
DESVAR	6016023	EngineKZ% x6%	.80000	2.00000	
DESVAR	6016031	L_Tq_SKX% x7%	.80000	2.00000	
DESVAR	6016041	R_Tq_SKX% x8%	.80000	2.00000	
DESVAR	6016211	Trans_DX% x9%	1558.0	1758.0	.05
DESVAR	6016212	Trans_DY% x10%	-547.0	-347.0	.05
DESVAR	6016213	Trans_DZ% x11%	400.0	600.0	.05
DESVAR	6016221	EngineDX% x12%	1497.0	1697.0	.05
DESVAR	6016222	EngineDY% x13%	180.5	380.5	.05
DESVAR	6016223	EngineDZ% x14%	297.0	497.0	.05
DESVAR	6016231	L_Tq_SDX% x15%	1258.0	1458.0	.05
DESVAR	6016232	L_Tq_SDY% x16%	-265.0	-65.0	.05



Configure Parameters

Delete	Parameter	Status	Low	High	Comments
	x1		.80000	2.00000	Field 4 of DES\
	x2		.80000	2.00000	Field 4 of DES\
	x3		.80000	2.00000	Field 4 of DES\
	x4		.80000	2.00000	Field 4 of DES\
	x5		.80000	2.00000	Field 4 of DES\
	x6		.80000	2.00000	Field 4 of DES\